EXHIBIT A

US005844596A

United States Patent [19]

Goodman

[11] Patent Number: 5,844,596

[45] Date of Patent: *Dec. 1, 1998

[54] **TWO-WAY RF COMMUNICATION AT POINTS OF CONVERGENCE OF WIRE PAIRS FROM SEPARATE INTERNAL TELEPHONE NETWORKS**

[75] Inventor: **David D. Goodman**, Arlington, Va.

[73] Assignee: **Inline Connection Corporation**, Arlington, Va.

[*] Notice: The term of this patent shall not extend beyond the expiration date of Pat. No. 5,010,399.

[21] Appl. No.: **814,837**

[22] Filed: **Mar. 11, 1997**

Related U.S. Application Data

[63] Continuation of Ser. No. 673,577, Jul. 1, 1996, abandoned, which is a continuation of Ser. No. 545,937, Oct. 20, 1995, abandoned, which is a continuation of Ser. No. 372,561, Jan. 13, 1995, abandoned, which is a continuation of Ser. No. 245,759, May 18, 1994, abandoned, which is a continuation of Ser. No. 115,930, Aug. 31, 1993, abandoned, which is a continuation of Ser. No. 802,738, Dec. 5, 1991, abandoned, Continuation-in-part of Ser. No. 688,864, Apr. 19, 1991, abandoned, Continuation-in-part of Ser. No. 379,751, Jul. 14, 1989, Pat. No. 5,010,399.

[51] Int. Cl.[6] **H04N 7/12**; H04M 11/00

[52] U.S. Cl. **348/14**; 348/17; 379/90.01; 379/102.03

[58] Field of Search 379/64, 65, 90.01, 379/102.01, 102.02, 102.03, 93.17, 93.26, 93.28, 93.37, 93.01; 348/14–16, 734, 7; 359/142, 145, 148

[56] **References Cited**

U.S. PATENT DOCUMENTS

3,723,653	3/1973	Tatsuzawa	348/17
3,937,889	2/1976	Bell, III et al.	179/2 DP
3,974,337	8/1976	Tatsuzawa	179/2 TV

(List continued on next page.)

FOREIGN PATENT DOCUMENTS

0 062 442	10/1982	European Pat. Off. .
0 408 236	1/1991	European Pat. Off. .
1-27358	1/1989	Japan .
2 166322	4/1986	United Kingdom .
2 166328	4/1986	United Kingdom .
WO 88/05979	8/1988	WIPO .

OTHER PUBLICATIONS

"Commtek Corporation Announces First Commercially Available Transmission of Real–Time Video and Voice on Unshielded Twisted Pair Telephone Lines," News Release, Commtek Corp., 4 pages, 1992.

(List continued on next page.)

Primary Examiner—Wing F. Chan

Attorney, Agent, or Firm—Fish & Richardson P.C.

[57] **ABSTRACT**

A system that provides video signal communication between a source of the video signal and a plurality of units that include destinations of the video signal includes an interface coupled to the source and to telephone lines, each of which serves at least one of the units and carries voice signals to and from one or more telephones coupled to the telephone line at said unit. The interface receives the video signal from the source, and transmits the received video signal onto at least one of the telephone lines in a selected frequency range that is different from frequencies at which the voice signals are carried on that telephone line. This causes the video signal to be coupled to a receiver which is connected to the telephone line at the unit served by that line and is adapted to recover the video signal from the telephone line and apply it to one or more of the destinations at the unit. The source is a cable (e.g., electrical or fibre optic) that is linked to the interface and that carries a plurality of video signals.

The destinations are, e.g., televisions. The units can be residences (such as individual houses or apartments in an apartment building) or offices in an office building.

61 Claims, 25 Drawing Sheets

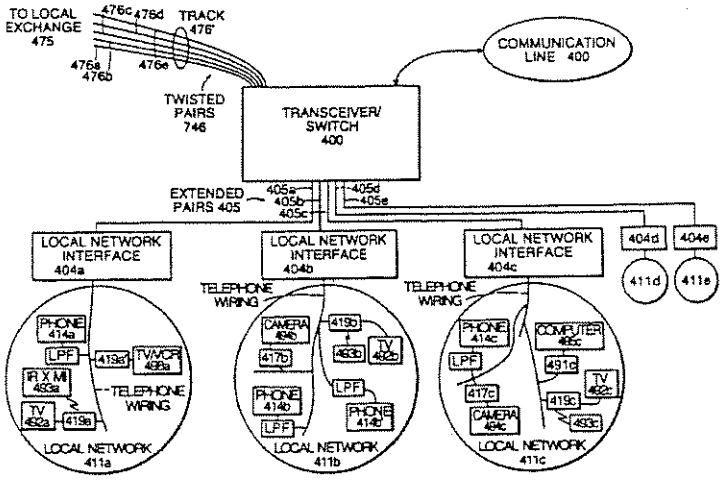

U.S. PATENT DOCUMENTS

3,992,589	11/1976	Kuegler	179/15 FS
4,054,910	10/1977	Chou et al.	358/86
4,328,579	5/1982	Hashimoto et al.	370/111
4,509,211	4/1985	Robbins	455/603
4,546,212	10/1985	Crowder, Sr.	179/2 C
4,608,686	8/1986	Barsellotti	370/69.1
4,670,874	6/1987	Sato et al.	370/110.1
4,679,227	7/1987	Hughes-Hartogs	379/98
4,709,412	11/1987	Seymour et al.	455/603
4,766,402	8/1988	Crane	333/25
4,785,448	11/1988	Reichert et al.	370/76
4,785,472	11/1988	Shapiro	379/96
4,829,570	5/1989	Schotz	381/3
4,849,811	7/1989	Kleinerman .	
4,882,747	11/1989	Williams	379/102
4,885,803	12/1989	Hermann et al.	455/603
4,890,316	12/1989	Walsh et al.	379/98
4,893,326	1/1990	Duran et al.	379/53
4,949,187	8/1990	Cohen	358/335
4,953,160	8/1990	Gupta	370/76
4,955,048	9/1990	Iwamura et al.	348/17
4,985,892	1/1991	Camarata	370/123
5,010,399	4/1991	Goodman et al.	358/85
5,089,886	2/1992	Grandmougin	358/86
5,546,385	8/1996	Caspi et al.	370/58.2
5,579,308	11/1996	Humpleman	370/58.1

OTHER PUBLICATIONS

Hofmann, "Cable, Television, and the Consumer Electronic Bus," The Int'l T.V. Symposium–Montreux, Switzerland, pp. 165–173, 1987.

Johnson, "Videohub Cuts Costs, Opens Options," Data Communications, *Data Communications*, pp. 109–110, 1992.

Nichols, "Build A Pair of Line–Carrier Modems," pp. 87–91, 1988.

Olshanksky, "A full service network for the copper plant," *Telephony*, pp. 52–60, 1985.

Propp et al., "The AC Powerline As A Communications Medium for DAC Applications," *IDAC*, pp. 17–25, 1990.

Schwartz, "Commtek Intro Video Over UTP," *Communications Week*, p. 5, 1992.

Sheets and Graf, "Build This Carrier Current Audio Transmitter," Radio Electronics, pp. 55–64, 1989.

Sheets and Graf, "Build This Carrier Current Receiver," Radio Electronics, pp. 55–94, 1989.

"TeleConcepts . . . Introduces the 'Just Plug It In' Intercom System," TeleConcepts brochure, Newington, CT, 2 pages undated.

"Remote Extender Owner's Manual," Windmaster Manufacturing brochure, DeFuniak Springs, FL, 7 pages, undated.

"Model 4000 Series," Lightwave Systems, Inc. brochure, 6 pages, undated.

"IBM races to the desktop," 1 page, undated.

"Video Transmission System—Send video over ordinary wire—no coax required," Javelin brochure, 2 pages undated.

Tele Video brochure, 2 pages, undated.

Advertisement for a MasterMind universal remote control device, 1989.

"Instant Network Rides on Phones Lines," Electronic Design, 1987.

Design and Engineering Exhibition listing.

FIG. 1a

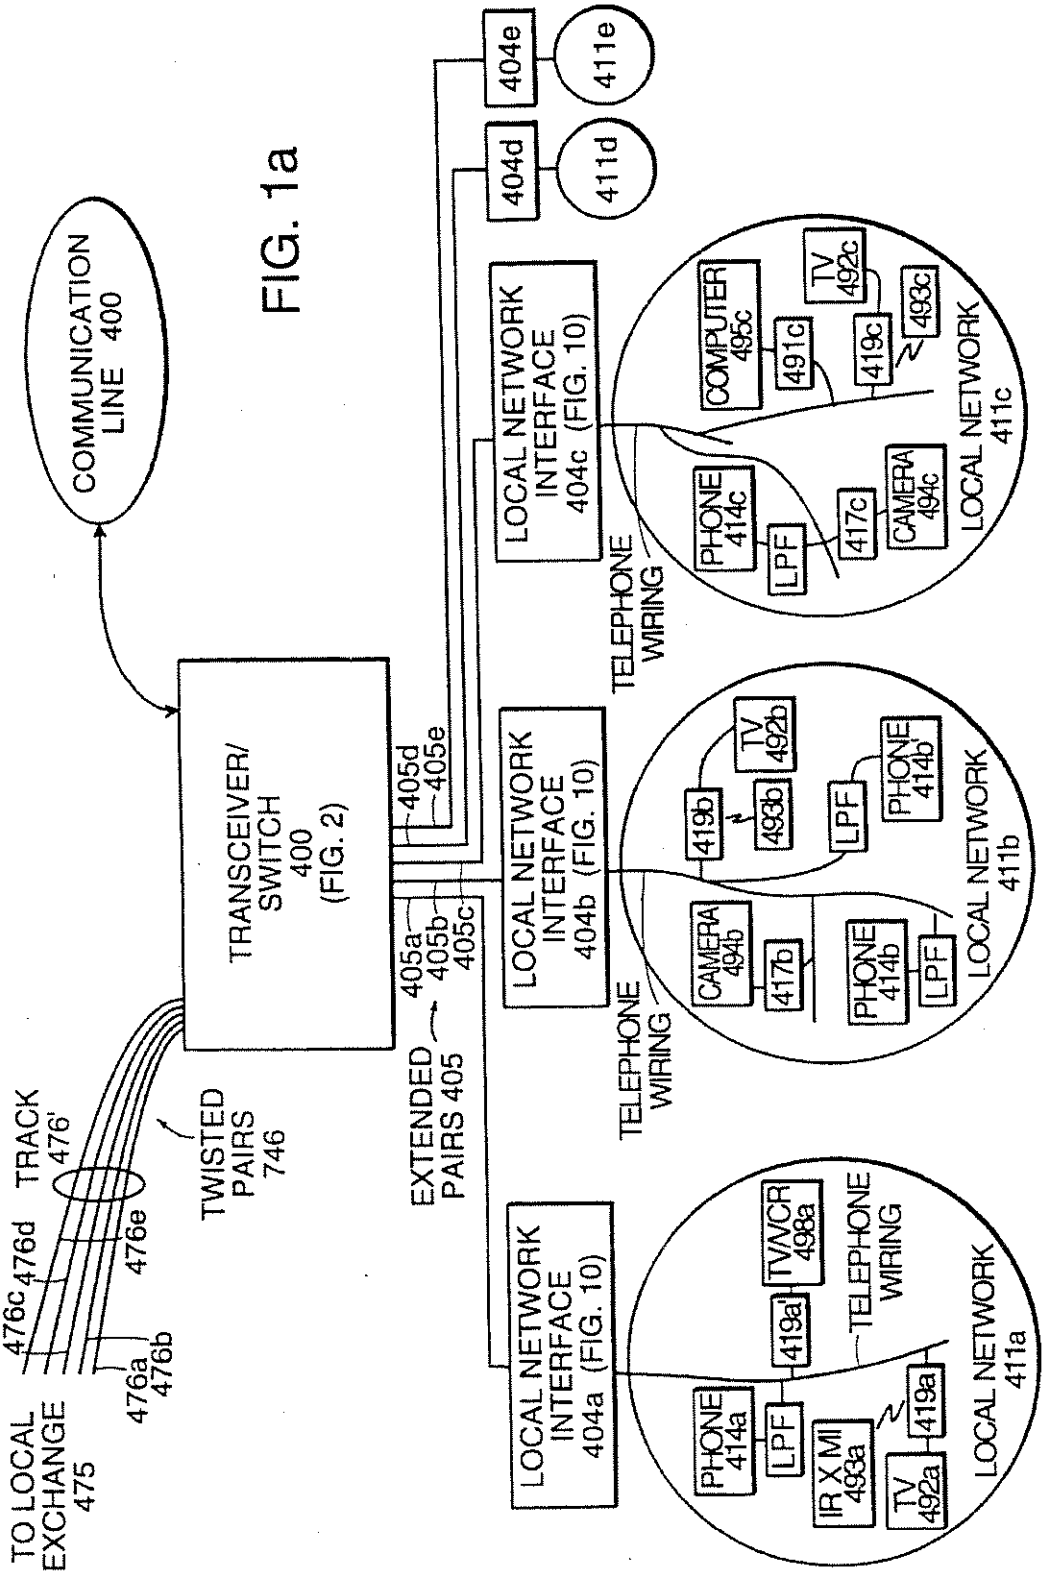
COMMUNICATION LINE 400
TRANSCEIVER/ SWITCH 400 (FIG. 2)
TO LOCAL EXCHANGE 475
TRACK 476'
476c 476d 476e 476a 476b
TWISTED PAIRS 746
EXTENDED PAIRS 405
405a 405b 405c 405d 405e
LOCAL NETWORK INTERFACE 404a (FIG. 10)
LOCAL NETWORK INTERFACE 404b (FIG. 10)
LOCAL NETWORK INTERFACE 404c (FIG. 10)
404d 404e
411d 411e
TELEPHONE WIRING
LOCAL NETWORK 411a
PHONE 414a
LPF
IR X MI 493a
TV 492a
419a
419aj
TV/VCR 498a
LOCAL NETWORK 411b
CAMERA 494b
417b
PHONE 414b
LPF
419b
493b
TV 492b
PHONE 414b
LPF
LOCAL NETWORK 411c
PHONE 414c
LPF
417c
CAMERA 494c
COMPUTER 495c
491c
419c
493c
TV 492c

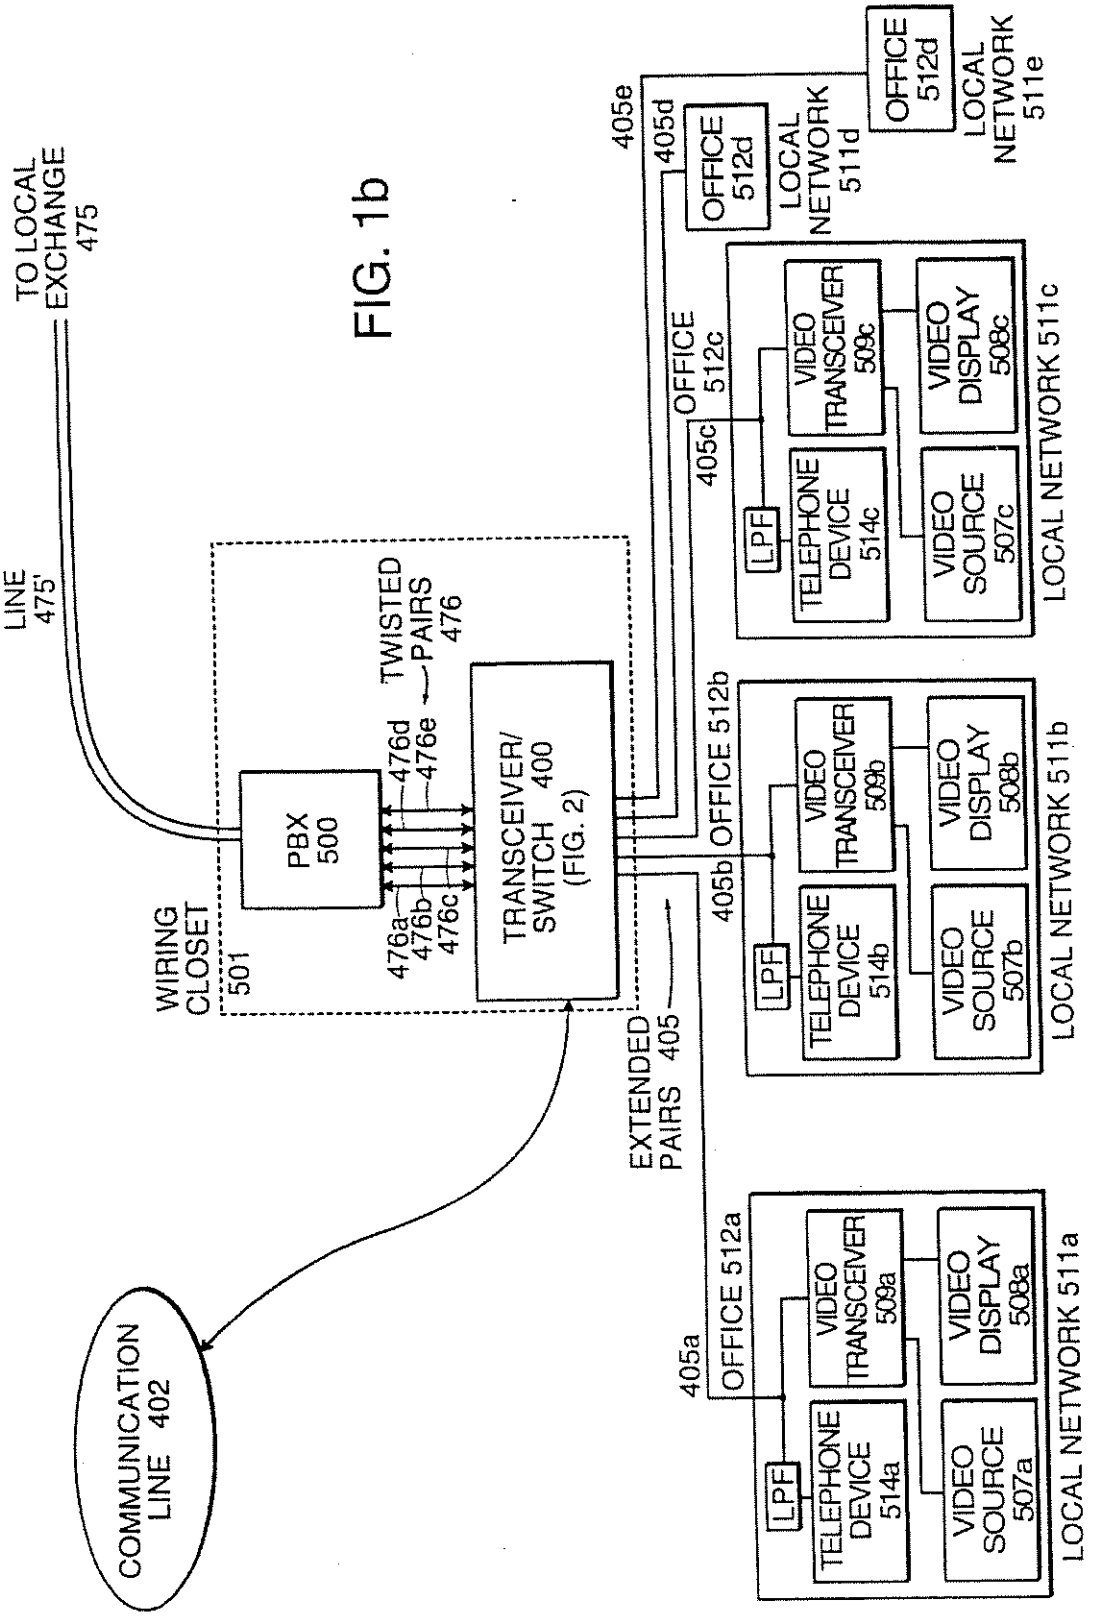
TO LOCAL EXCHANGE 475
LINE 475'
WIRING CLOSET 501
PBX 500
TWISTED PAIRS 476
476a
476b
476c
476d
476e
TRANSCEIVER/ SWITCH 400 (FIG. 2)
EXTENDED PAIRS 405
COMMUNICATION LINE 402
405a
OFFICE 512a
LPF
TELEPHONE DEVICE 514a
VIDEO TRANSCEIVER 509a
VIDEO SOURCE 507a
VIDEO DISPLAY 508a
LOCAL NETWORK 511a
405b
OFFICE 512b
LPF
TELEPHONE DEVICE 514b
VIDEO TRANSCEIVER 509b
VIDEO SOURCE 507b
VIDEO DISPLAY 508b
LOCAL NETWORK 511b
405c
OFFICE 512c
LPF
TELEPHONE DEVICE 514c
VIDEO TRANSCEIVER 509c
VIDEO SOURCE 507c
VIDEO DISPLAY 508c
LOCAL NETWORK 511c
405d
OFFICE 512d
LOCAL NETWORK 511d
405e
OFFICE 512d
LOCAL NETWORK 511e

FIG. 1b

FIG. 2

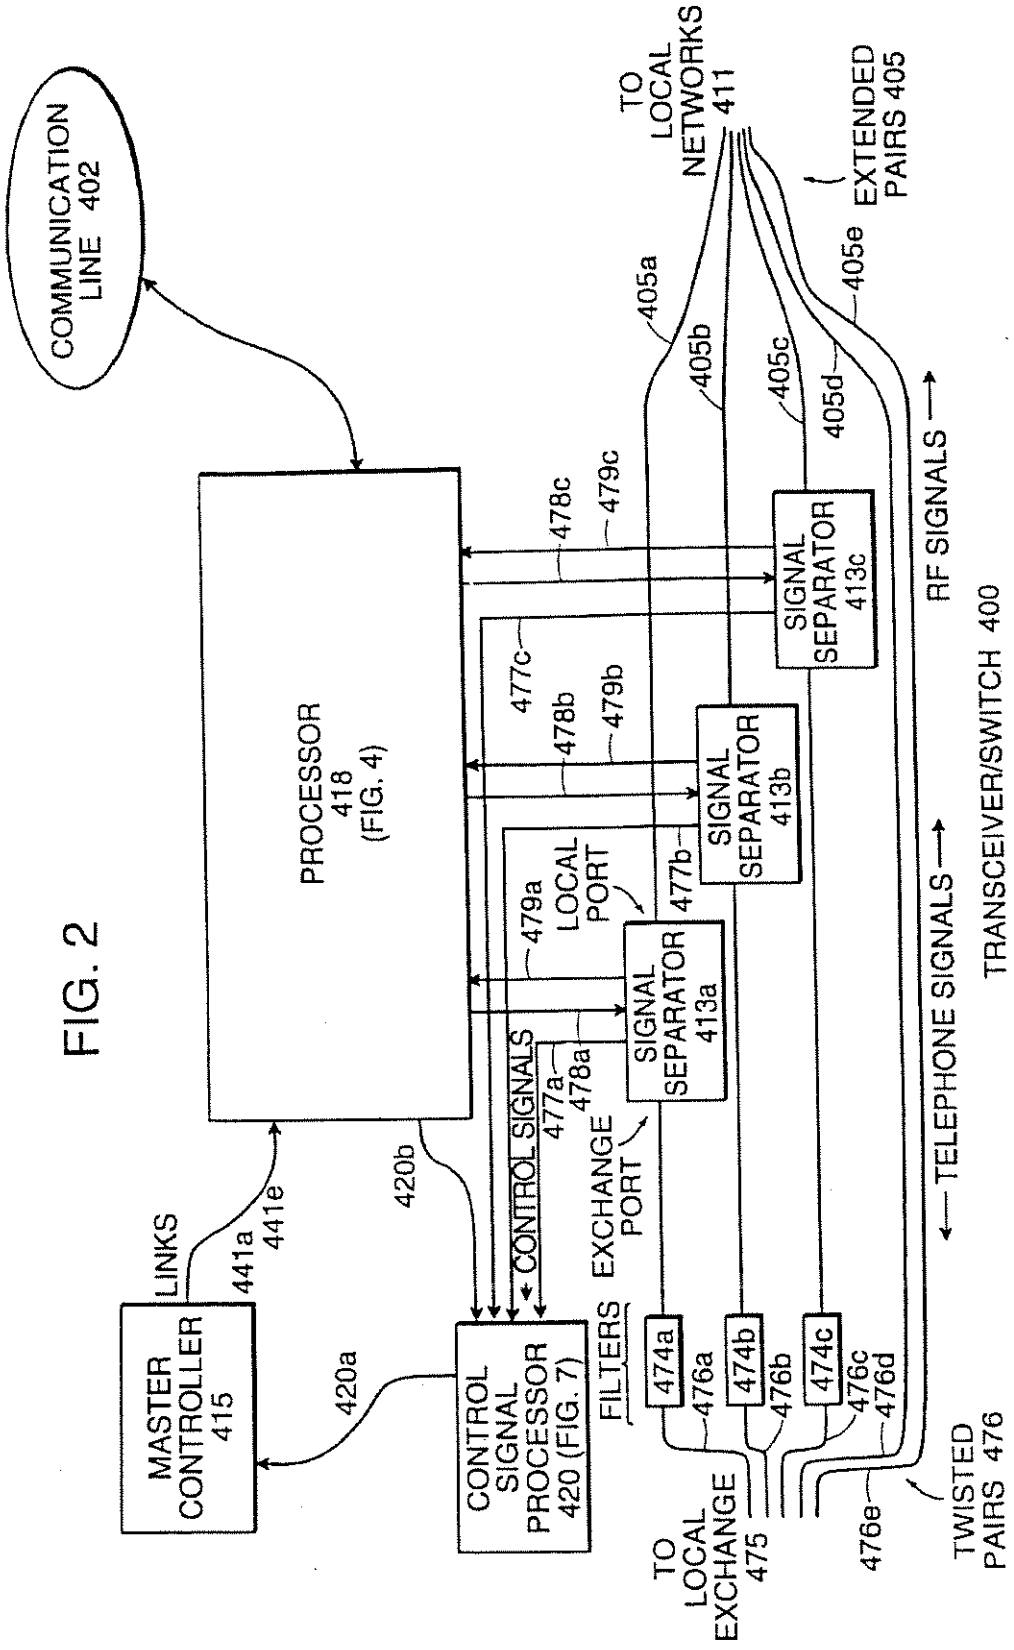
COMMUNICATION LINE 402
TO LOCAL NETWORKS 411
EXTENDED PAIRS 405
405a
405b
405c
405d
405e
PROCESSOR 418 (FIG. 4)
478c
479c
477c
478b
479b
477b
479a
LOCAL PORT
478a
477a
CONTROL SIGNALS
EXCHANGE PORT
SIGNAL SEPARATOR 413c
SIGNAL SEPARATOR 413b
SIGNAL SEPARATOR 413a
RF SIGNALS
TELEPHONE SIGNALS
TRANSCEIVER/SWITCH 400
LINKS
441a
441e
420b
420a
MASTER CONTROLLER 415
CONTROL SIGNAL PROCESSOR 420 (FIG. 7)
FILTERS
474a
474b
474c
476a
476b
476c
476d
476e
TO LOCAL EXCHANGE 475
TWISTED PAIRS 476

FIG. 3a

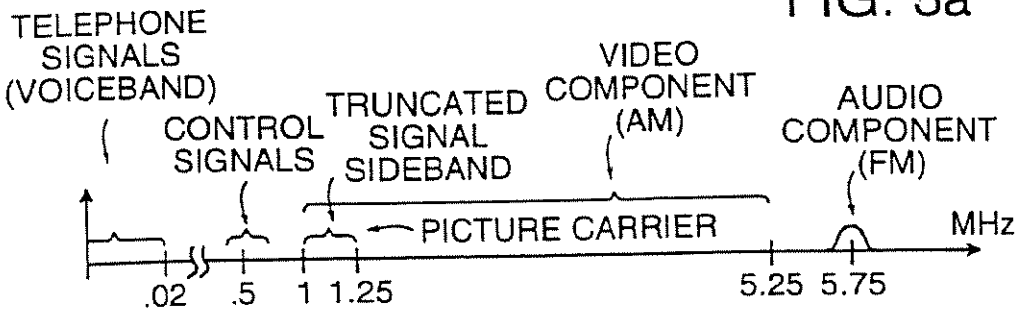

SPECTRUM OF AN AMPLITUDE MODULATED NTSC SIGNAL NEAR VOICEBAND

FIG. 3b

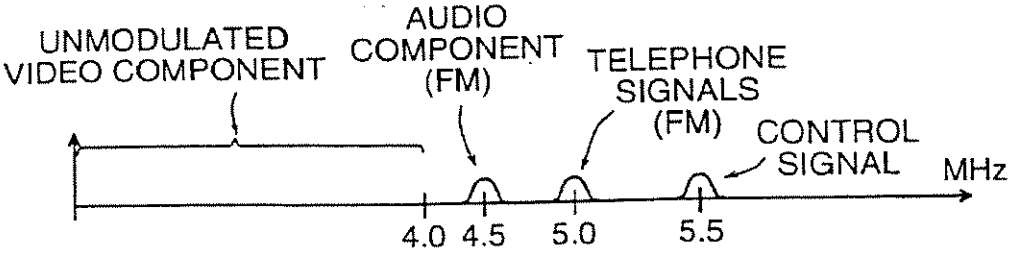

SPECTRUM OF AN NTSC SIGNAL TRANSMITTING AT BASEBAND

FIG. 3c

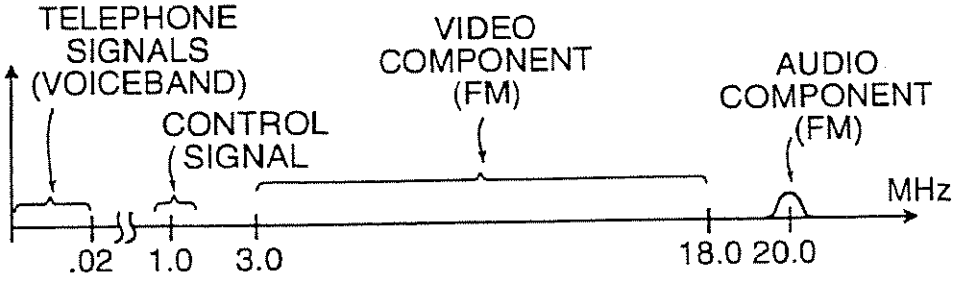

SPECTRUM OF AN FM NTSC SIGNAL NEAR VOICEBAND

FIG. 4

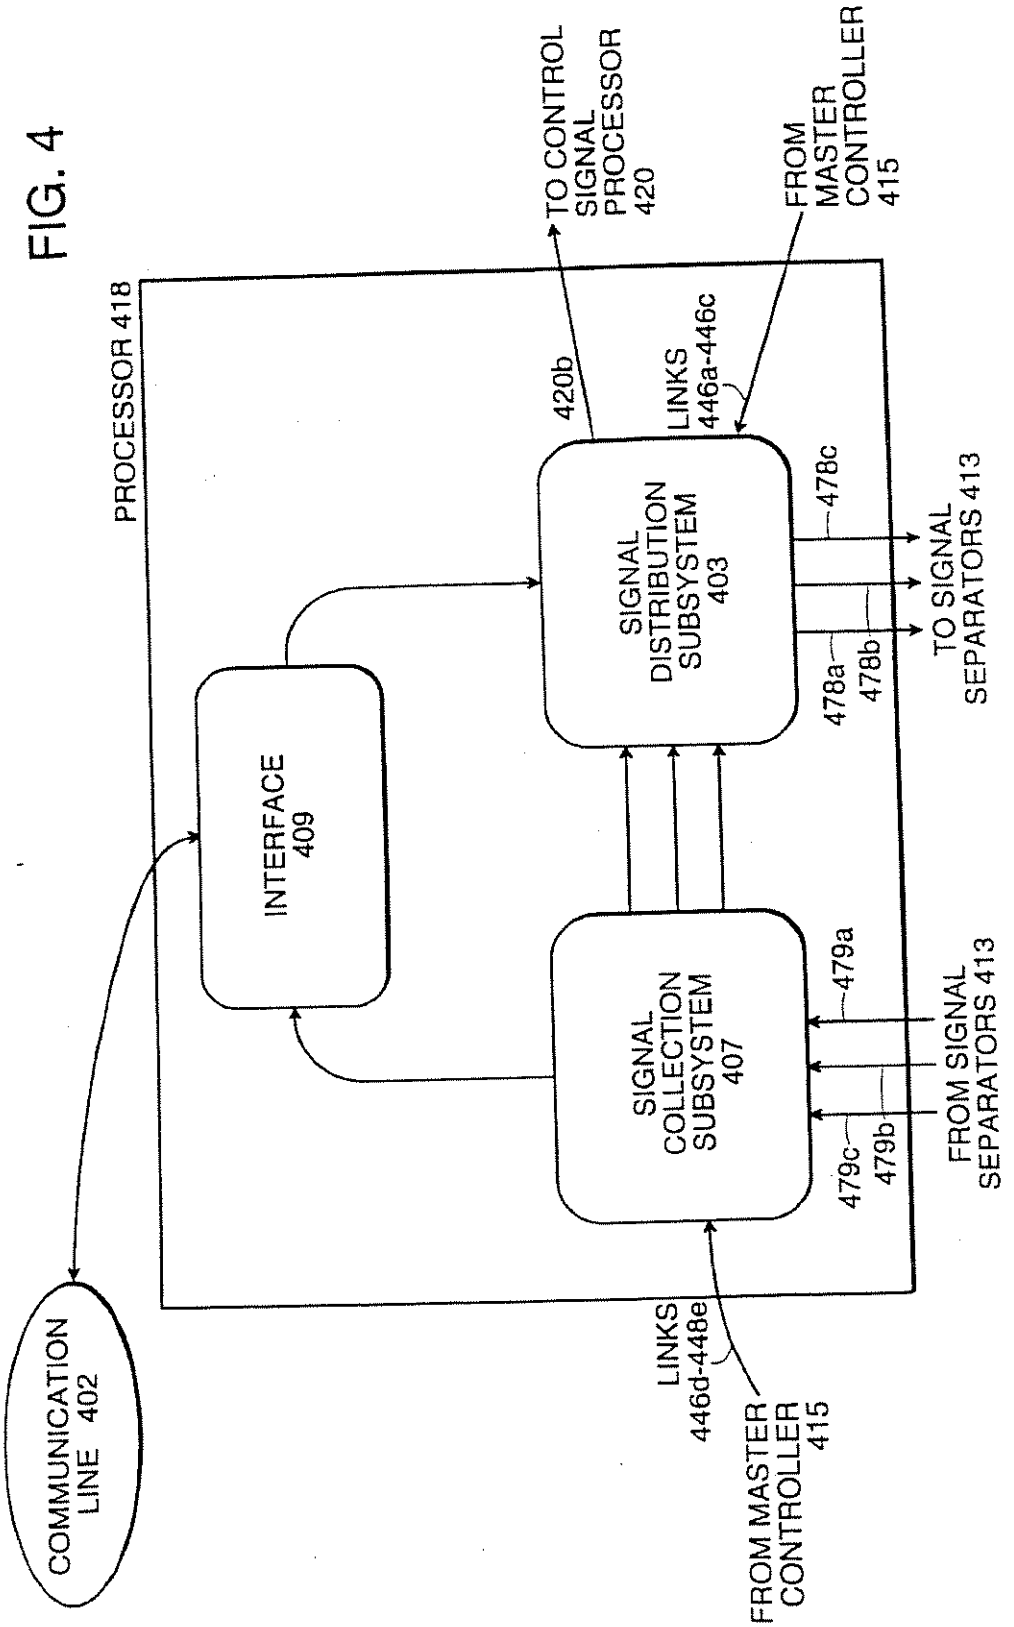
PROCESSOR 418
TO CONTROL SIGNAL PROCESSOR 420
FROM MASTER CONTROLLER 415
420b
LINKS 446a-446c
SIGNAL DISTRIBUTION SUBSYSTEM 403
478c
478a
478b
TO SIGNAL SEPARATORS 413
INTERFACE 409
SIGNAL COLLECTION SUBSYSTEM 407
479a
479c
479b
FROM SIGNAL SEPARATORS 413
COMMUNICATION LINE 402
LINKS 446d-448e
FROM MASTER CONTROLLER 415

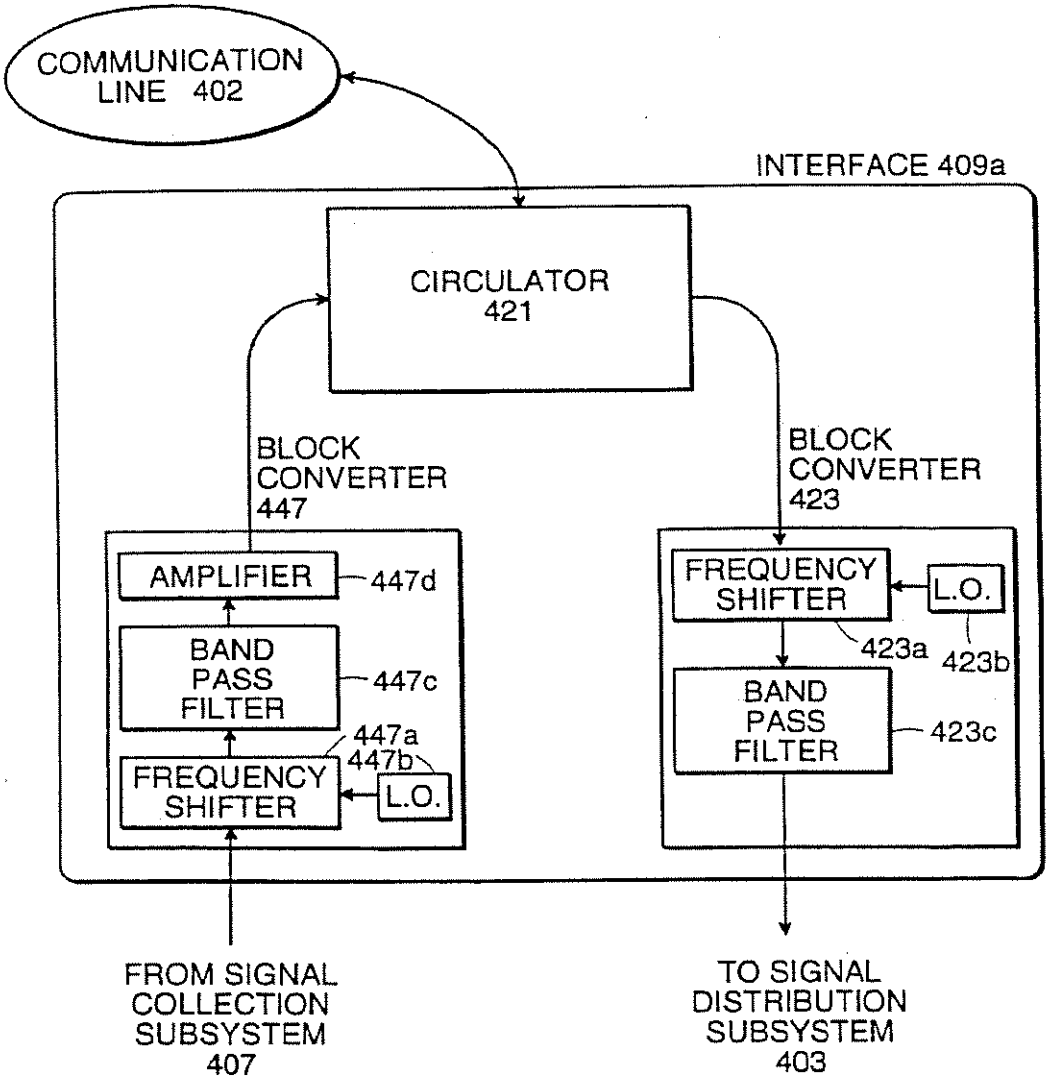
COMMUNICATION LINE 402
INTERFACE 409a
CIRCULATOR 421
BLOCK CONVERTER 447
AMPLIFIER
447d
BAND PASS FILTER
447c
447a
447b
FREQUENCY SHIFTER
L.O.
BLOCK CONVERTER 423
FREQUENCY SHIFTER
L.O.
423a
423b
BAND PASS FILTER
423c
FROM SIGNAL COLLECTION SUBSYSTEM 407
TO SIGNAL DISTRIBUTION SUBSYSTEM 403

FIG. 4a

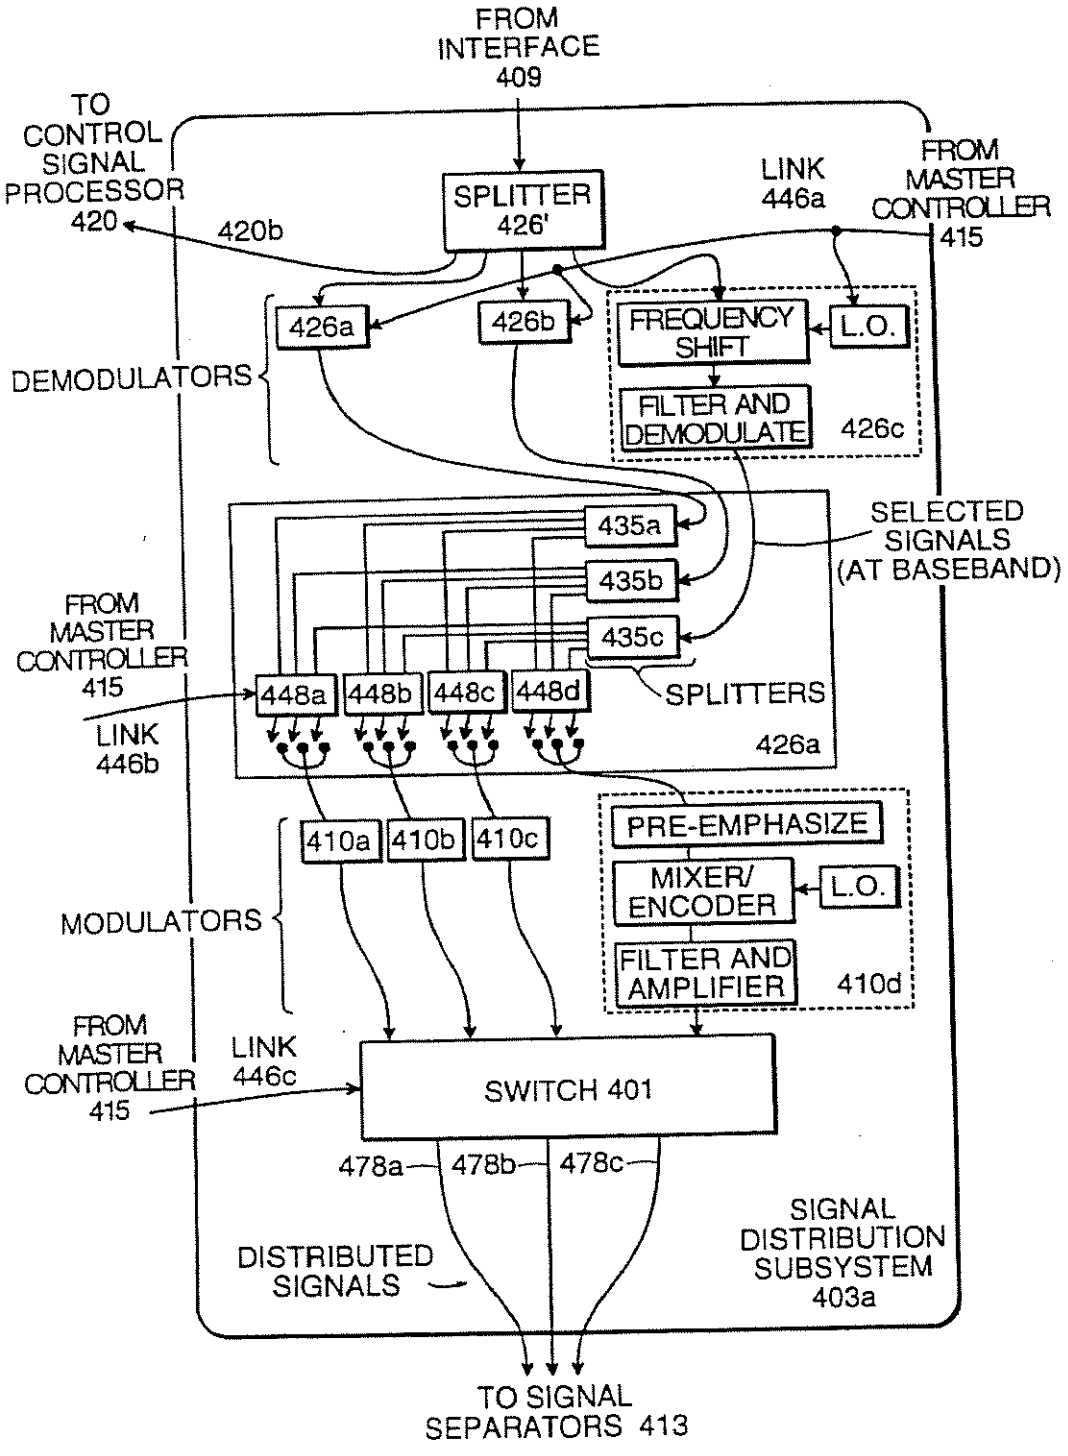
FROM INTERFACE 409
TO CONTROL SIGNAL PROCESSOR 420
420b
SPLITTER 426'
LINK 446a
FROM MASTER CONTROLLER 415
426a
426b
FREQUENCY SHIFT
L.O.
FILTER AND DEMODULATE
426c
DEMODULATORS
435a
435b
435c
SELECTED SIGNALS (AT BASEBAND)
FROM MASTER CONTROLLER 415
448a
448b
448c
448d
SPLITTERS
LINK 446b
426a
410a
410b
410c
PRE-EMPHASIZE
MIXER/ ENCODER
L.O.
FILTER AND AMPLIFIER
410d
MODULATORS
FROM MASTER CONTROLLER 415
LINK 446c
SWITCH 401
478a
478b
478c
DISTRIBUTED SIGNALS
SIGNAL DISTRIBUTION SUBSYSTEM 403a
TO SIGNAL SEPARATORS 413

FIG. 5a

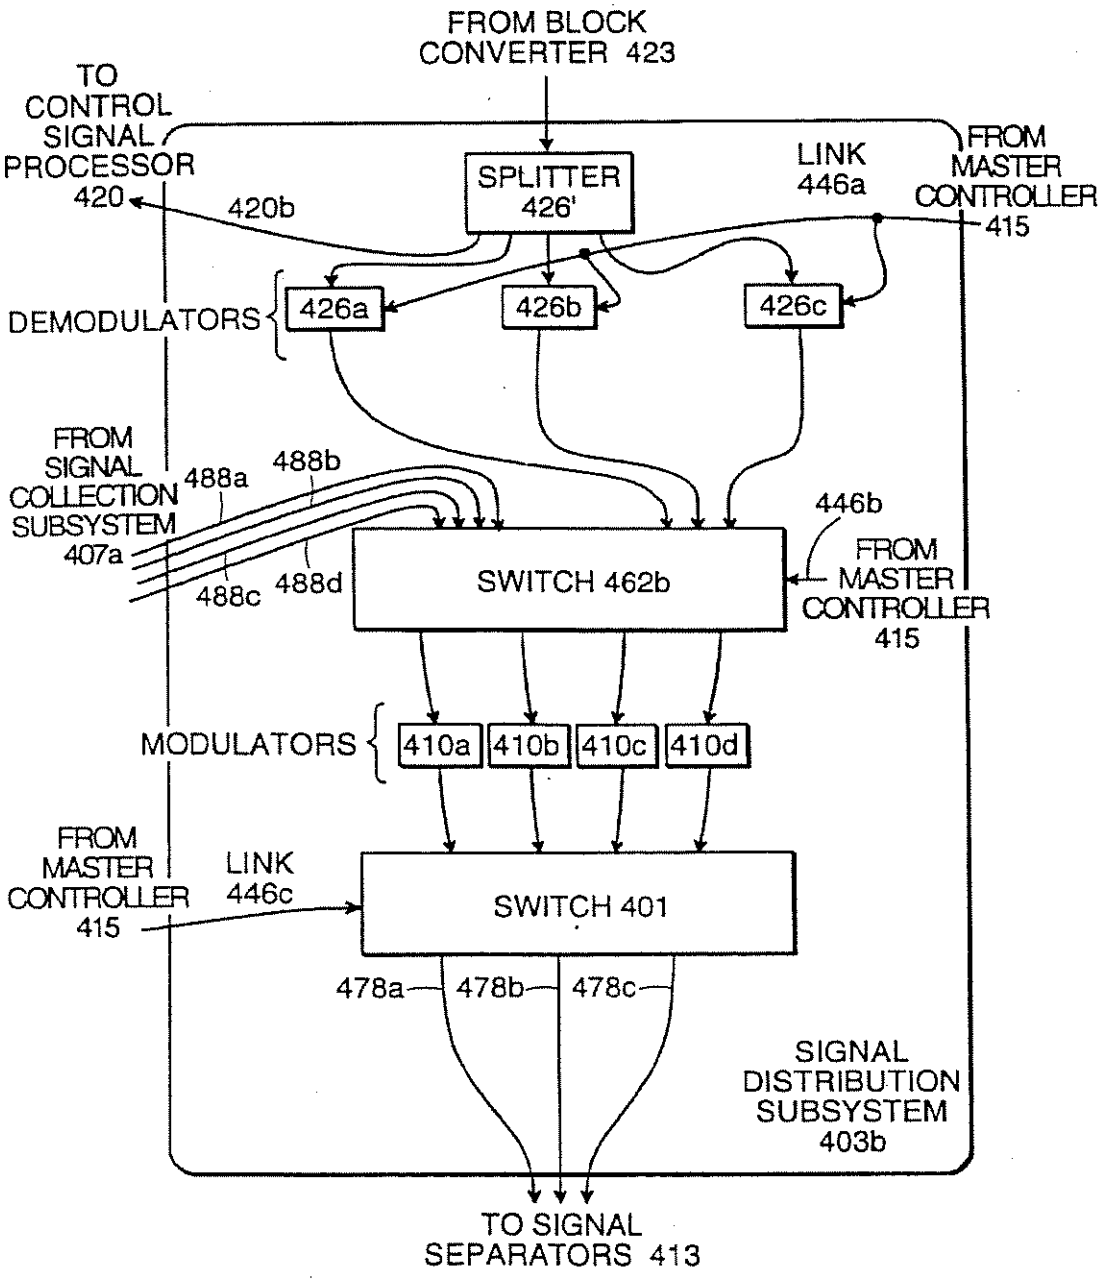
FROM BLOCK CONVERTER 423
TO CONTROL SIGNAL PROCESSOR 420
420b
SPLITTER 426'
LINK 446a
FROM MASTER CONTROLLER 415
DEMODULATORS
426a
426b
426c
FROM SIGNAL COLLECTION SUBSYSTEM 407a
488a
488b
488c
488d
446b
SWITCH 462b
FROM MASTER CONTROLLER 415
MODULATORS
410a
410b
410c
410d
FROM MASTER CONTROLLER 415
LINK 446c
SWITCH 401
478a
478b
478c
SIGNAL DISTRIBUTION SUBSYSTEM 403b
TO SIGNAL SEPARATORS 413

FIG. 5b

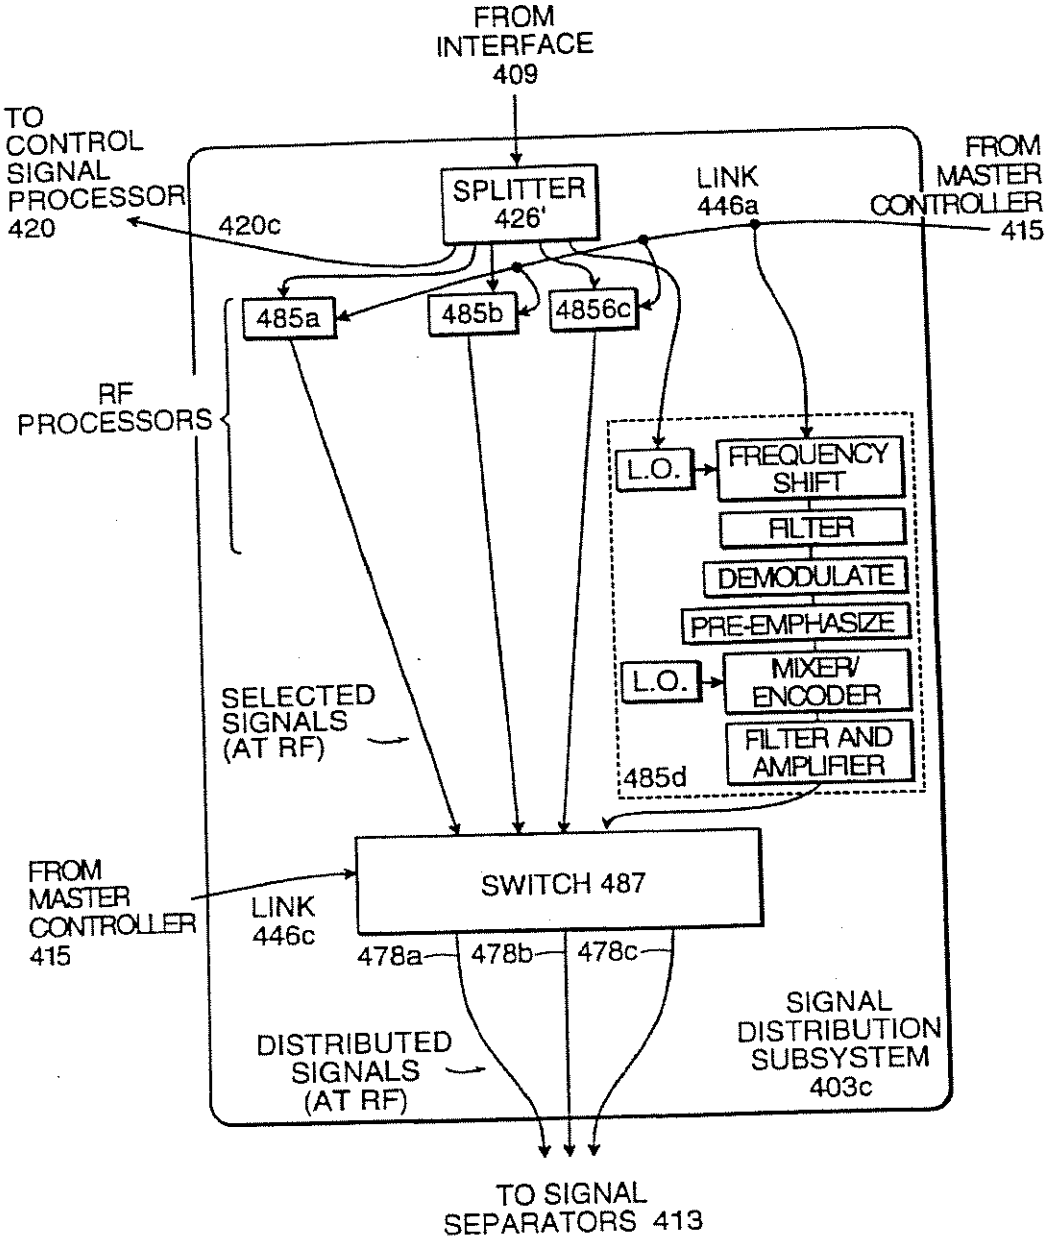
FROM INTERFACE 409
TO CONTROL SIGNAL PROCESSOR 420
420c
SPLITTER 426'
LINK 446a
FROM MASTER CONTROLLER 415
485a
485b
4856c
RF PROCESSORS
L.O.
FREQUENCY SHIFT
FILTER
DEMODULATE
PRE-EMPHASIZE
L.O.
MIXER/ ENCODER
FILTER AND AMPLIFIER
485d
SELECTED SIGNALS (AT RF)
FROM MASTER CONTROLLER 415
LINK 446c
SWITCH 487
478a
478b
478c
DISTRIBUTED SIGNALS (AT RF)
SIGNAL DISTRIBUTION SUBSYSTEM 403c
TO SIGNAL SEPARATORS 413

FIG. 5c

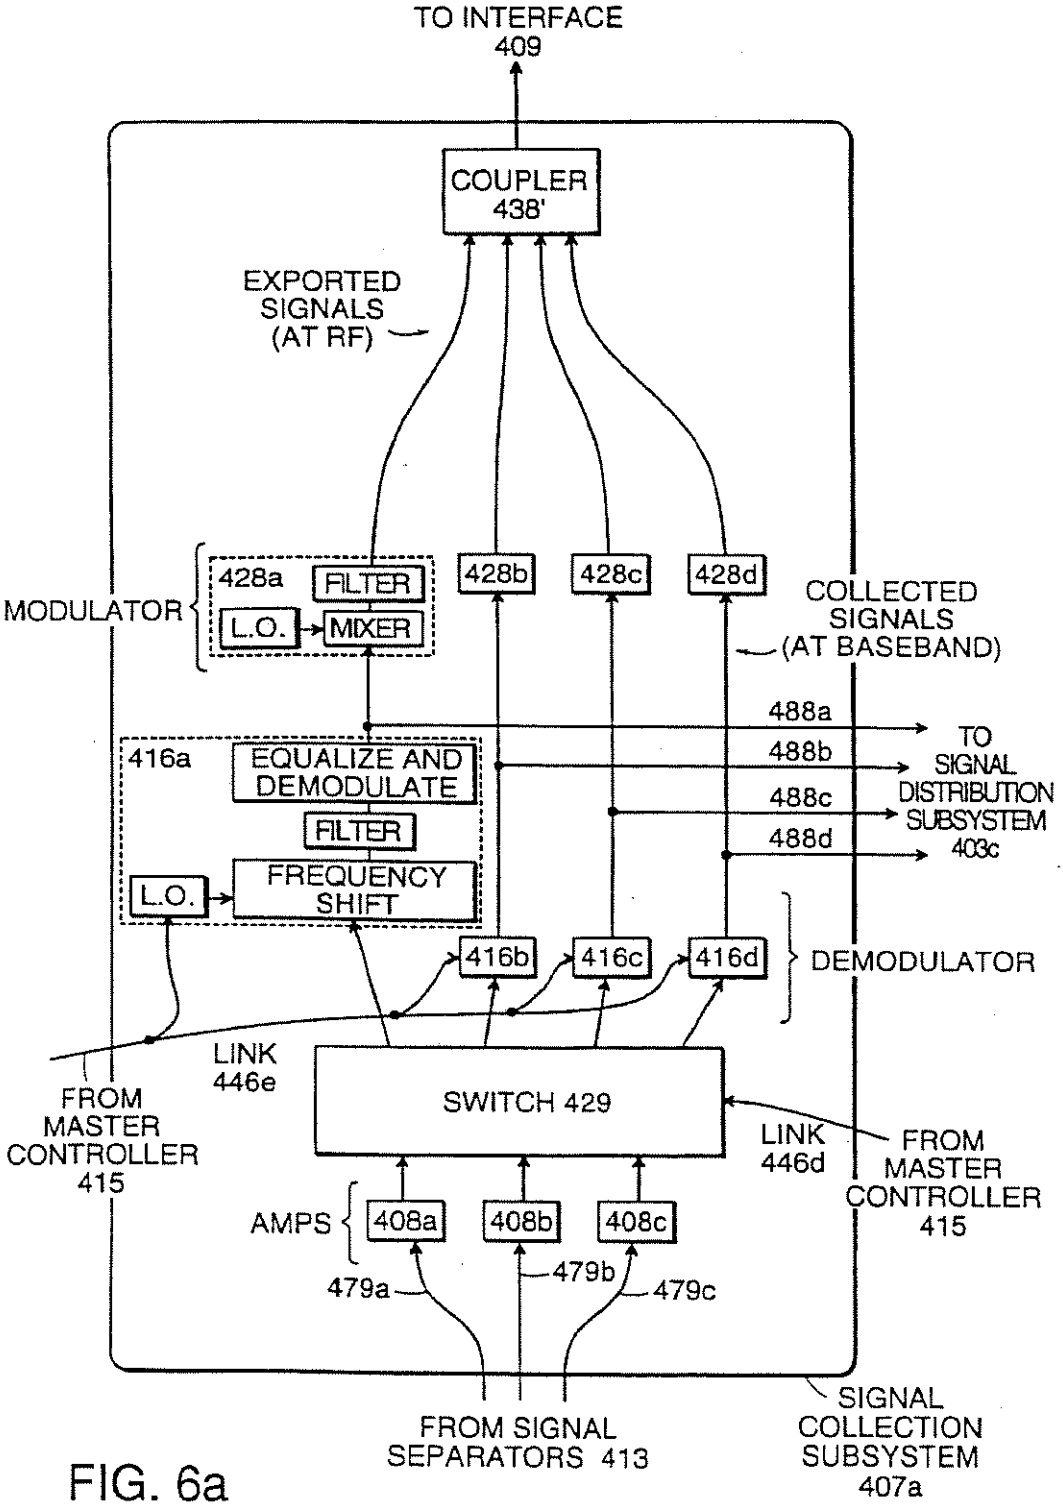
TO INTERFACE
409
COUPLER
438'
EXPORTED
SIGNALS
(AT RF)
MODULATOR
428a
FILTER
L.O.
MIXER
428b
428c
428d
COLLECTED
SIGNALS
(AT BASEBAND)
488a
488b
488c
488d
TO
SIGNAL
DISTRIBUTION
SUBSYSTEM
403c
416a
EQUALIZE AND
DEMODULATE
FILTER
L.O.
FREQUENCY
SHIFT
416b
416c
416d
DEMODULATOR
LINK
446e
FROM
MASTER
CONTROLLER
415
SWITCH 429
LINK
446d
FROM
MASTER
CONTROLLER
415
AMPS
408a
408b
408c
479a
479b
479c
FROM SIGNAL
SEPARATORS 413
SIGNAL
COLLECTION
SUBSYSTEM
407a

FIG. 6a

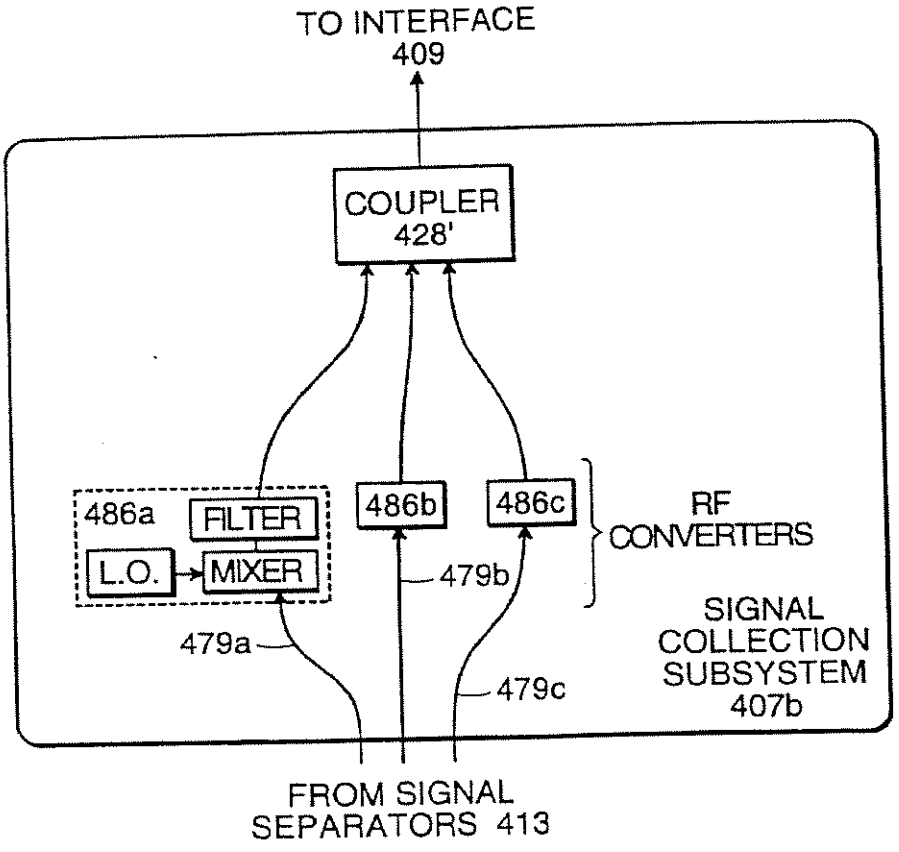
TO INTERFACE
409
COUPLER
428'
486a
FILTER
L.O.
MIXER
486b
486c
RF
CONVERTERS
479b
479a
479c
SIGNAL
COLLECTION
SUBSYSTEM
407b
FROM SIGNAL
SEPARATORS 413

FIG. 6b

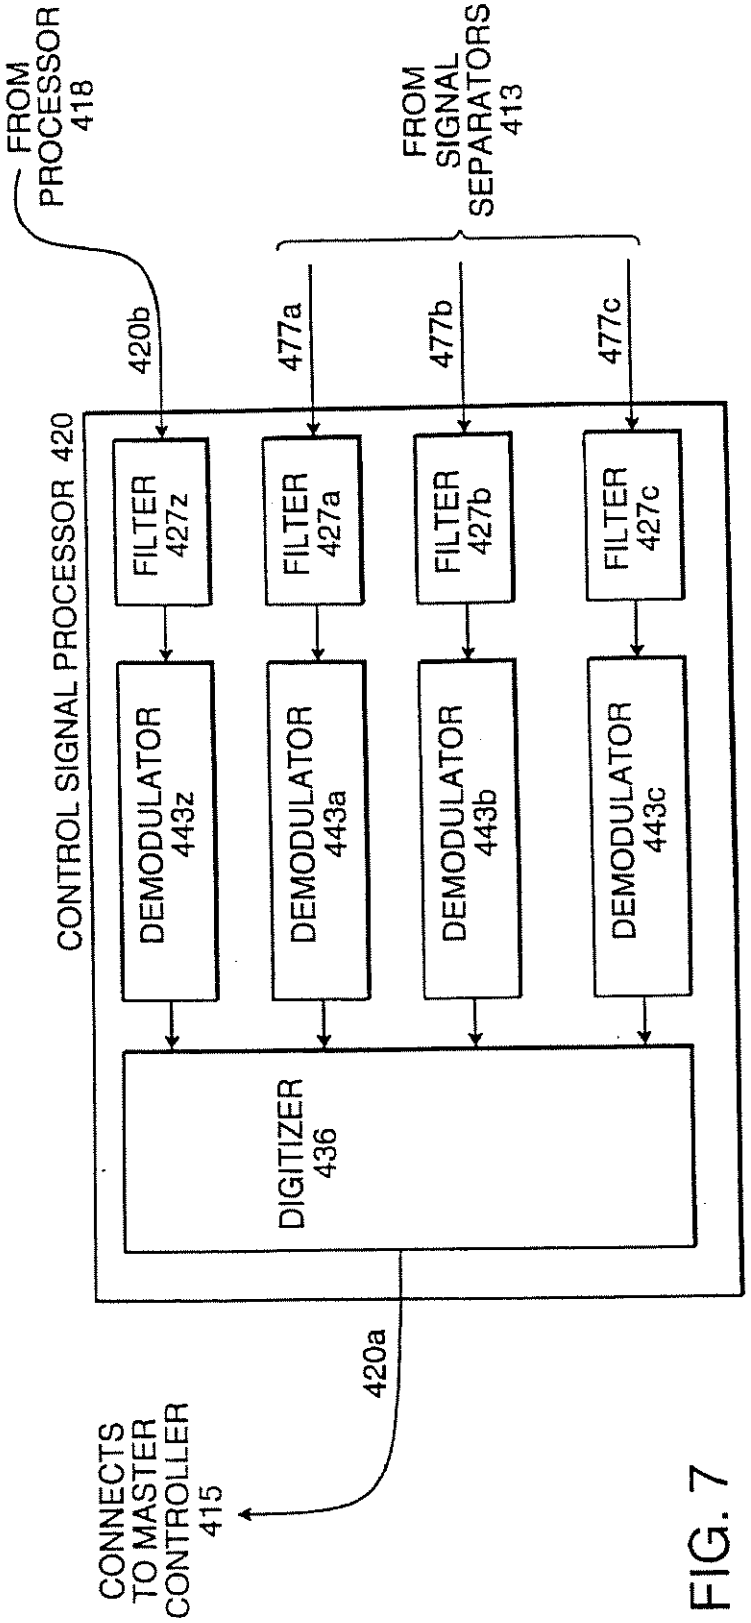
FROM PROCESSOR 418
FROM SIGNAL SEPARATORS 413
420b
477a
477b
477c
CONTROL SIGNAL PROCESSOR 420
FILTER 427z
FILTER 427a
FILTER 427b
FILTER 427c
DEMODULATOR 443z
DEMODULATOR 443a
DEMODULATOR 443b
DEMODULATOR 443c
DIGITIZER 436
420a
CONNECTS TO MASTER CONTROLLER 415

FIG. 7

FIG. 8

	ORIGIN/DEST	FREQUENCY DURING TRANSMISSION OVER EXTENDED PAIRS (MHz)			FREQUENCY DURING TRANSMISSION OVER LOCAL NETWORKS (MHz)		
		405a	405b	405c	411a	411b	411c
CONTROL A	493a/415	22.75-23.25			22.75-23.25		
B	493b/415		22.75-23.25			22.75-23.25	
C	493c/415			22.75-23.25			22.75-23.25
VIDEO U	402/492a	1-6(AM)			12-18(AM)		
V	402/492b 492c 498a	7-22(FM)	1-6(AM)	1-6(AM)	24-30(AM)	54-60(AM)	12-18(AM)
W	494b/402		24-54(FM)			6-12(AM)	
X	494c/402			24-54(FM)			6-12(AM)
DIGITAL Y	402/495c			6-18			18-40
Z	495c/402			54-100			1-6

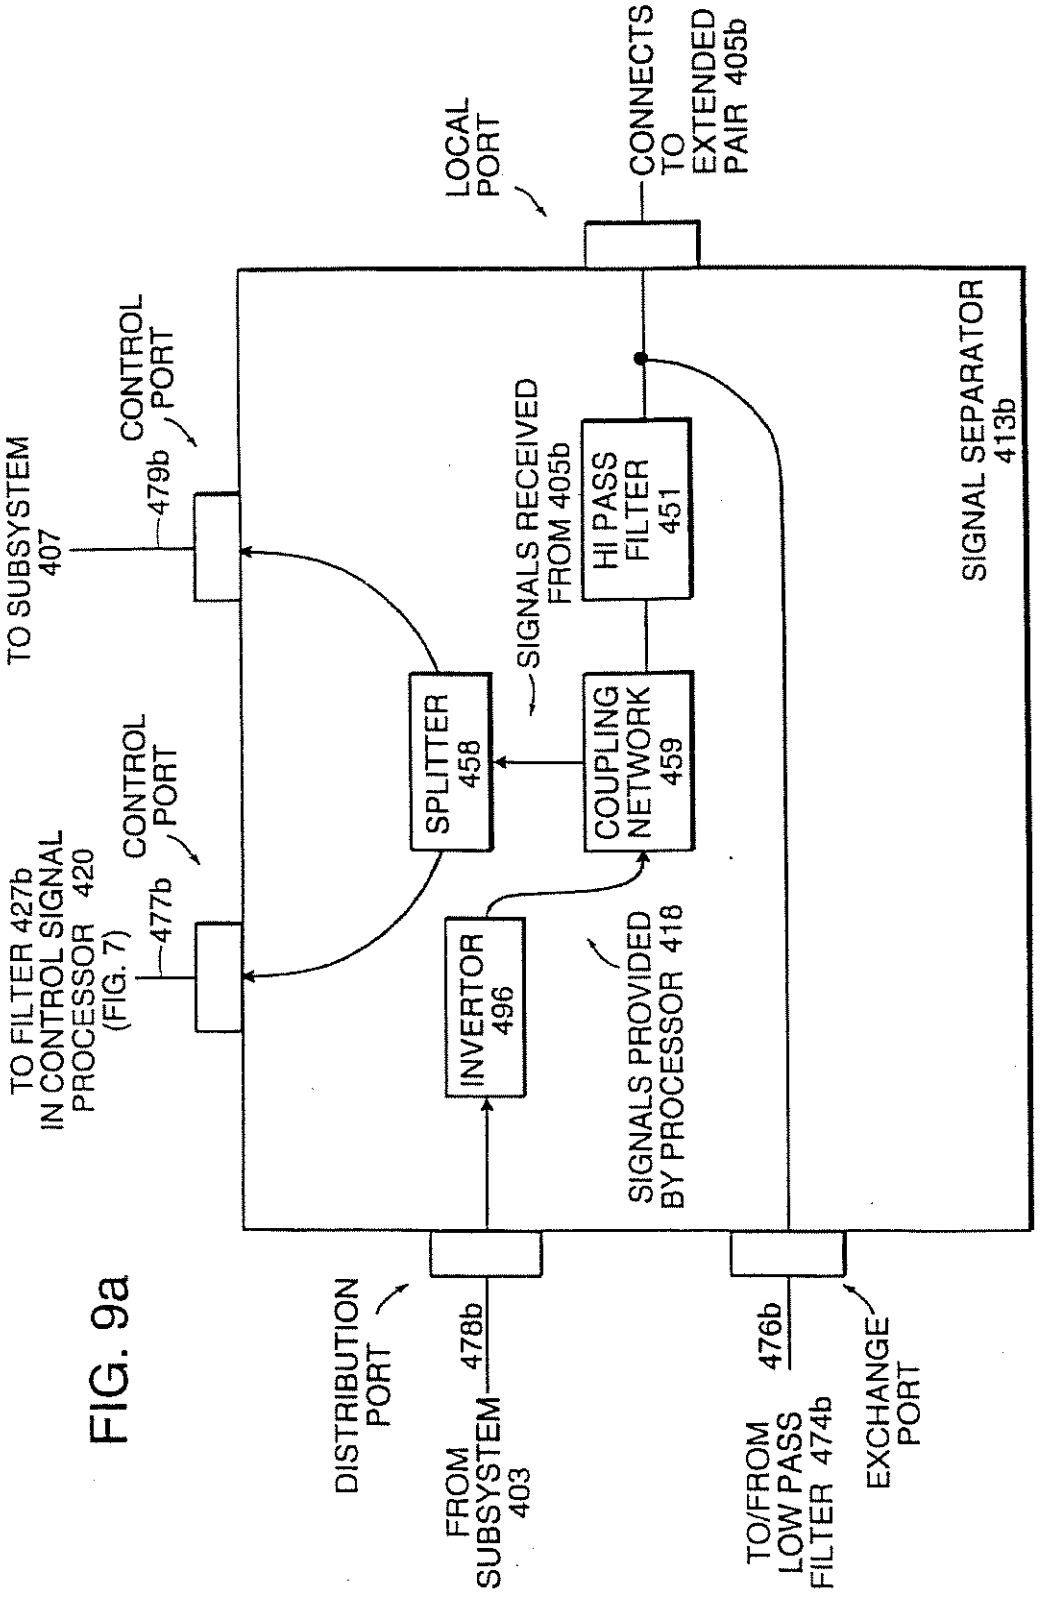
LOCAL PORT
CONNECTS TO EXTENDED PAIR 405b
CONTROL PORT
479b
TO SUBSYSTEM 407
SIGNALS RECEIVED FROM 405b
HI PASS FILTER 451
SIGNAL SEPARATOR 413b
SPLITTER 458
COUPLING NETWORK 459
CONTROL PORT
477b
TO FILTER 427b IN CONTROL SIGNAL PROCESSOR 420 (FIG. 7)
INVERTOR 496
SIGNALS PROVIDED BY PROCESSOR 418
DISTRIBUTION PORT
478b
FROM SUBSYSTEM 403
476b
TO/FROM LOW PASS FILTER 474b
EXCHANGE PORT

FIG. 9a

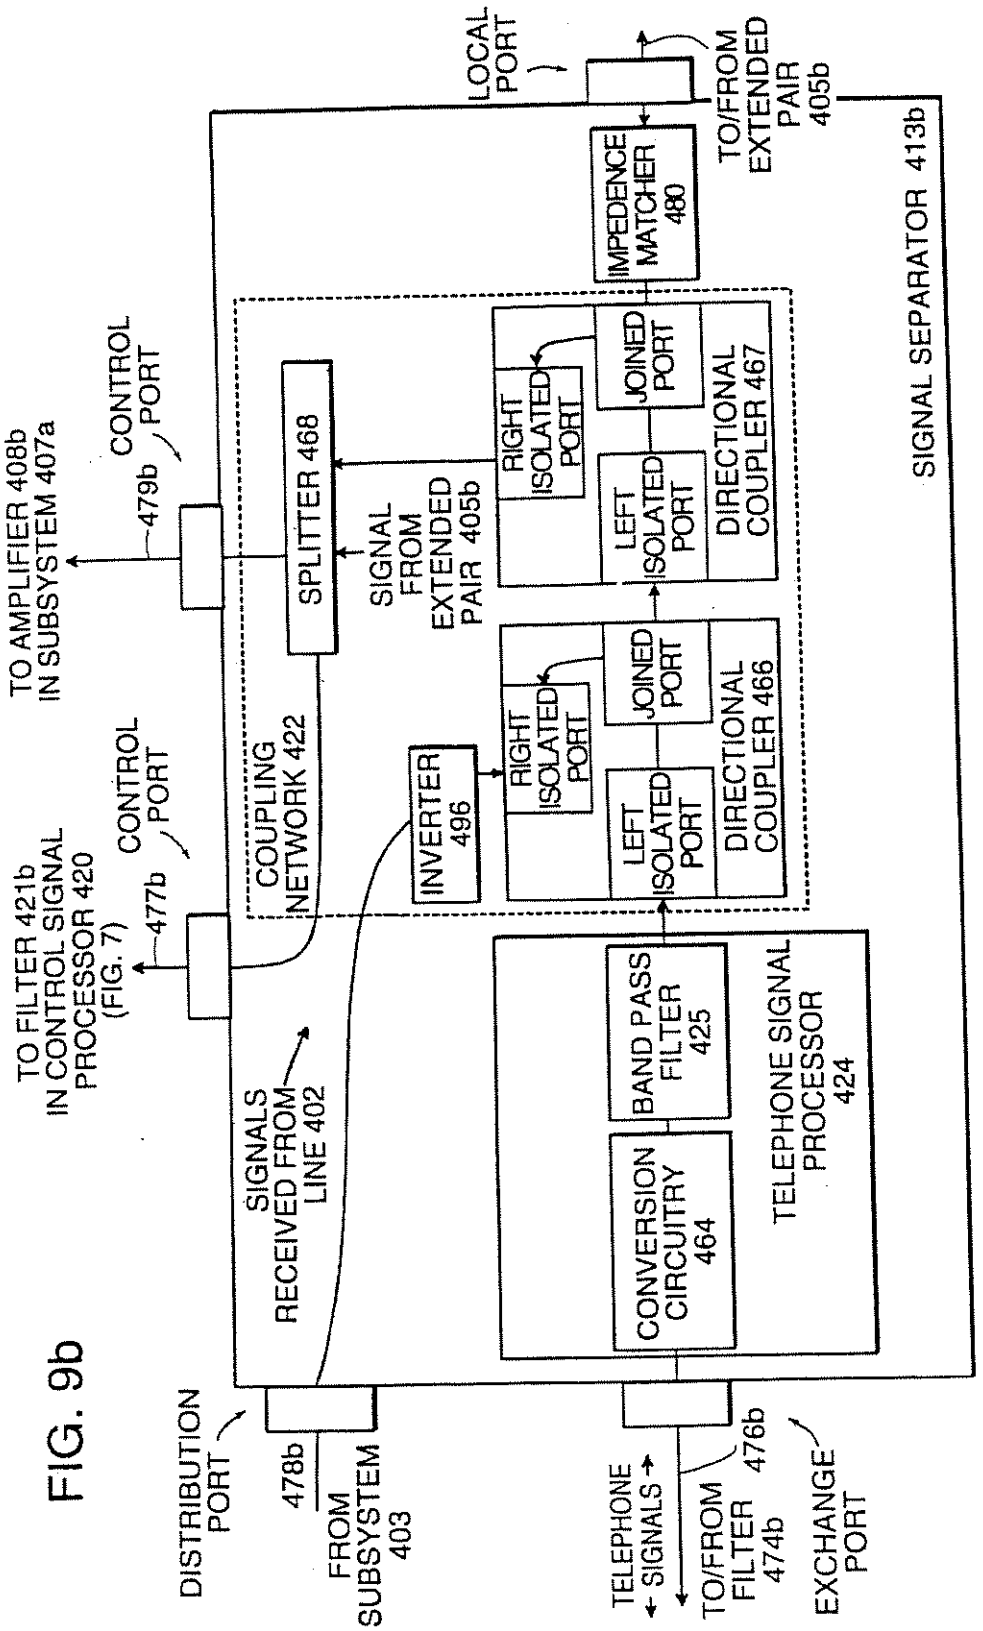
LOCAL PORT
TO/FROM EXTENDED PAIR 405b
IMPEDENCE MATCHER 480
SIGNAL SEPARATOR 413b
CONTROL PORT 479b
TO AMPLIFIER 408b IN SUBSYSTEM 407a
SPLITTER 468
SIGNAL FROM EXTENDED PAIR 405b
RIGHT ISOLATED PORT
JOINED PORT
LEFT ISOLATED PORT
DIRECTIONAL COUPLER 467
COUPLING NETWORK 422
INVERTER 496
RIGHT ISOLATED PORT
JOINED PORT
LEFT ISOLATED PORT
DIRECTIONAL COUPLER 466
CONTROL PORT 477b
TO FILTER 421b IN CONTROL SIGNAL PROCESSOR 420 (FIG. 7)
SIGNALS RECEIVED FROM LINE 402
BAND PASS FILTER 425
CONVERSION CIRCUITRY 464
TELEPHONE SIGNAL PROCESSOR 424
DISTRIBUTION PORT
478b
FROM SUBSYSTEM 403
TELEPHONE SIGNALS
TO/FROM FILTER 474b
476b
EXCHANGE PORT

FIG. 9b

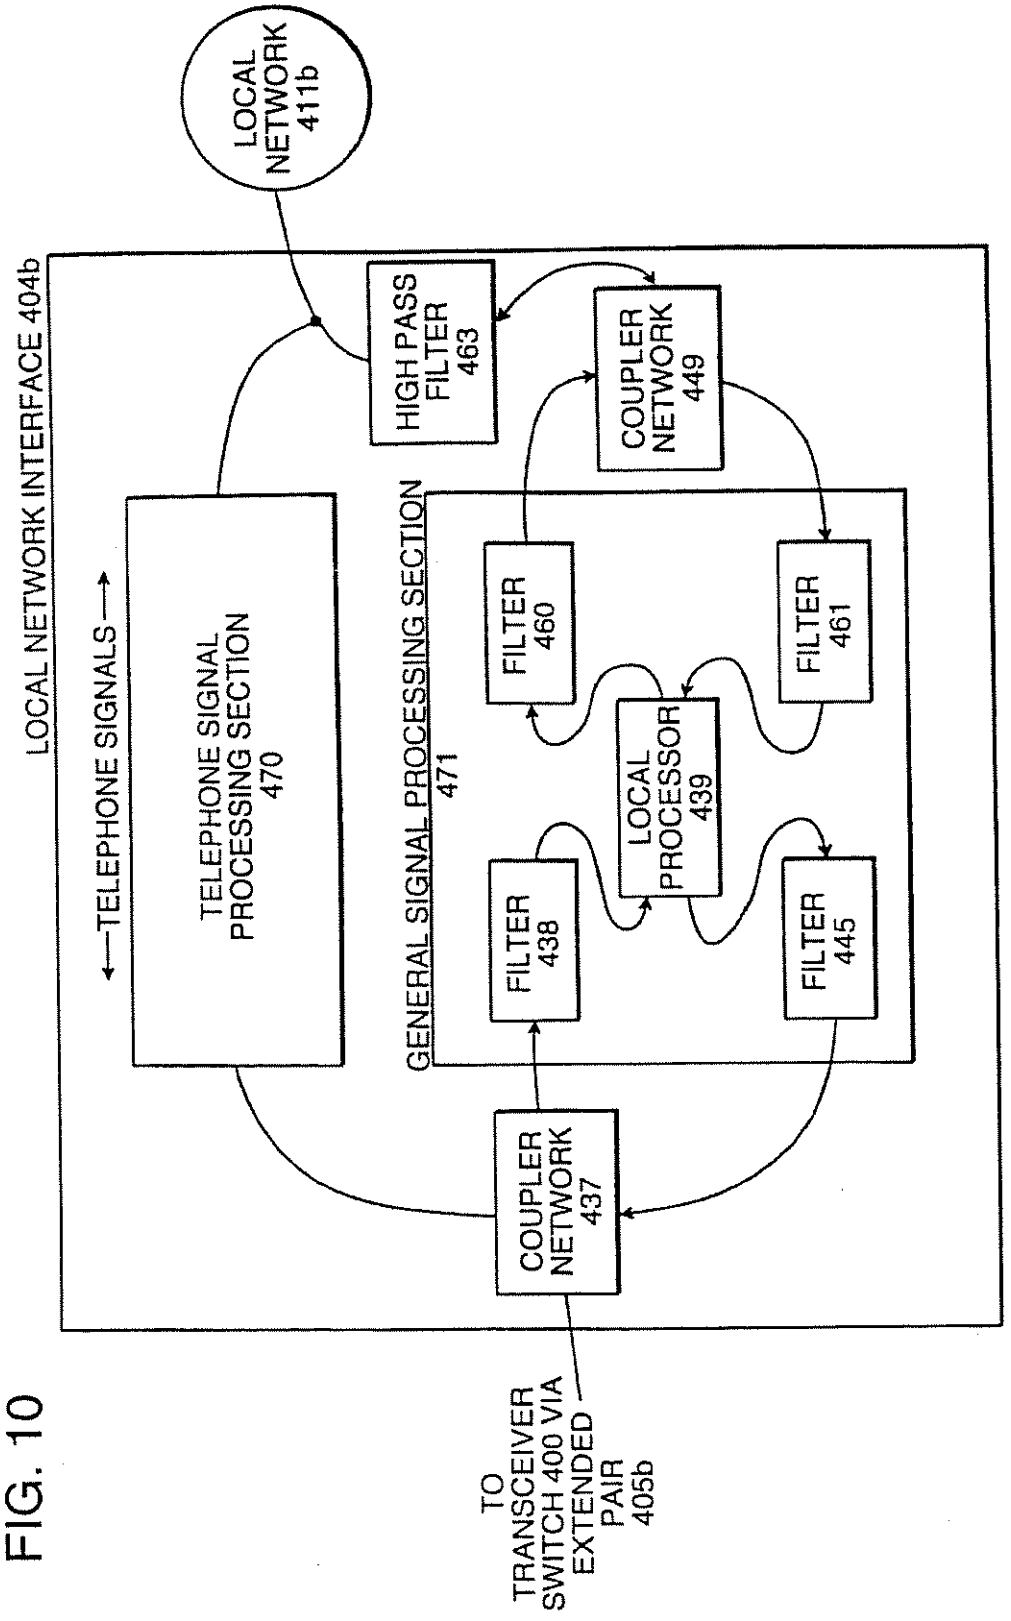
LOCAL NETWORK 411b
LOCAL NETWORK INTERFACE 404b
HIGH PASS FILTER 463
COUPLER NETWORK 449
TELEPHONE SIGNALS
TELEPHONE SIGNAL PROCESSING SECTION 470
GENERAL SIGNAL PROCESSING SECTION 471
FILTER 460
FILTER 461
LOCAL PROCESSOR 439
FILTER 438
FILTER 445
COUPLER NETWORK 437
TO TRANSCEIVER SWITCH 400 VIA EXTENDED PAIR 405b

FIG. 10

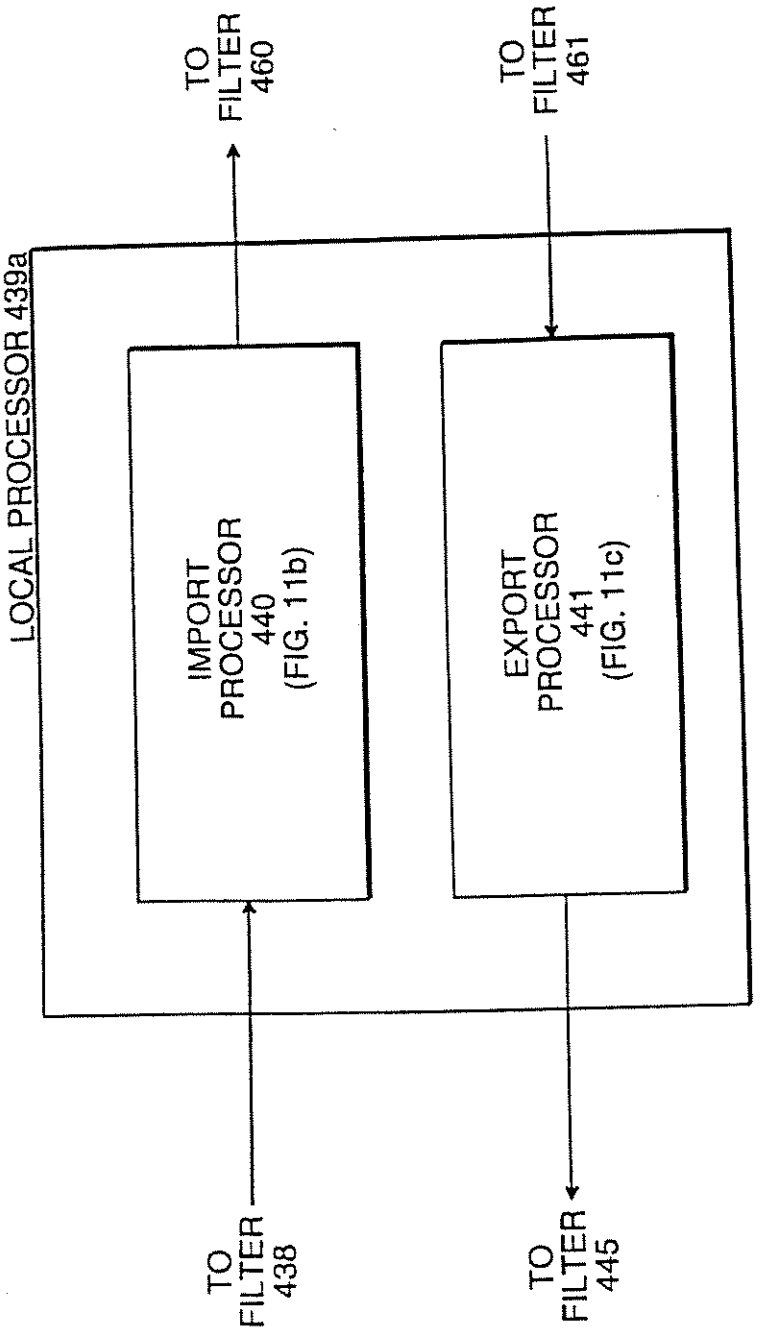
TO FILTER 460
TO FILTER 461
LOCAL PROCESSOR 439a
IMPORT PROCESSOR 440 (FIG. 11b)
EXPORT PROCESSOR 441 (FIG. 11c)
TO FILTER 438
TO FILTER 445

FIG. 11a

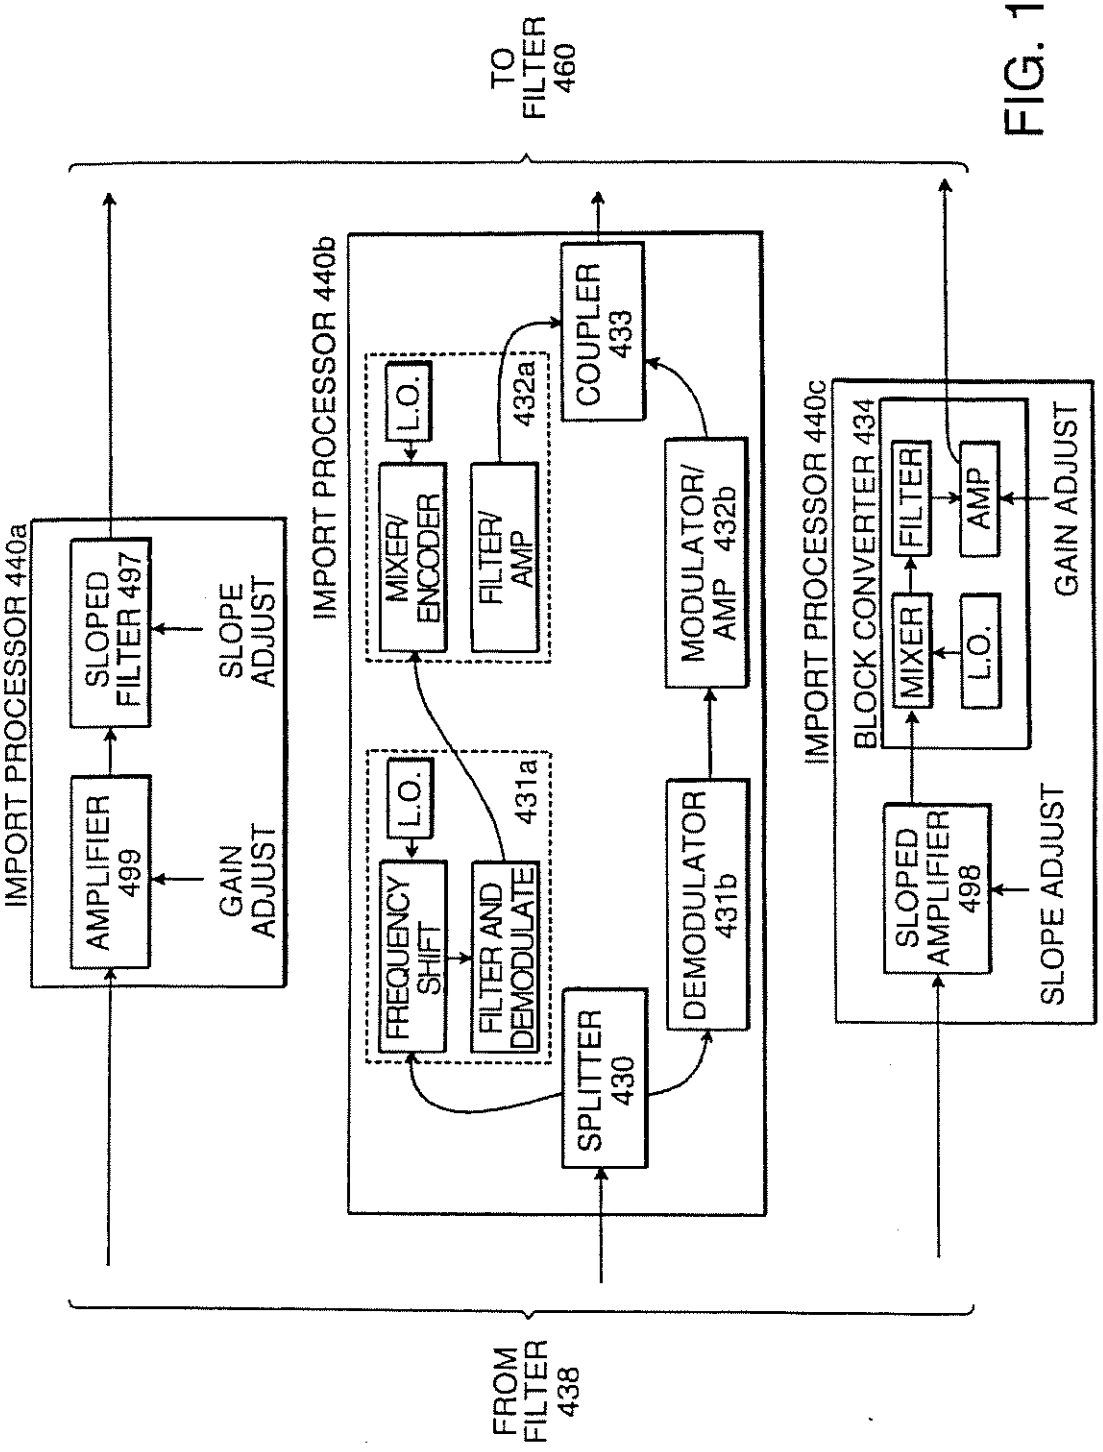
TO FILTER 460
IMPORT PROCESSOR 440a
SLOPED FILTER 497
SLOPE ADJUST
AMPLIFIER 499
GAIN ADJUST
IMPORT PROCESSOR 440b
L.O.
MIXER/ ENCODER
FILTER/ AMP
432a
COUPLER 433
MODULATOR/ AMP 432b
L.O.
FREQUENCY SHIFT
FILTER AND DEMODULATE
431a
SPLITTER 430
DEMODULATOR 431b
IMPORT PROCESSOR 440c
BLOCK CONVERTER 434
MIXER
L.O.
FILTER
AMP
GAIN ADJUST
SLOPED AMPLIFIER 498
SLOPE ADJUST
FROM FILTER 438

FIG. 11b

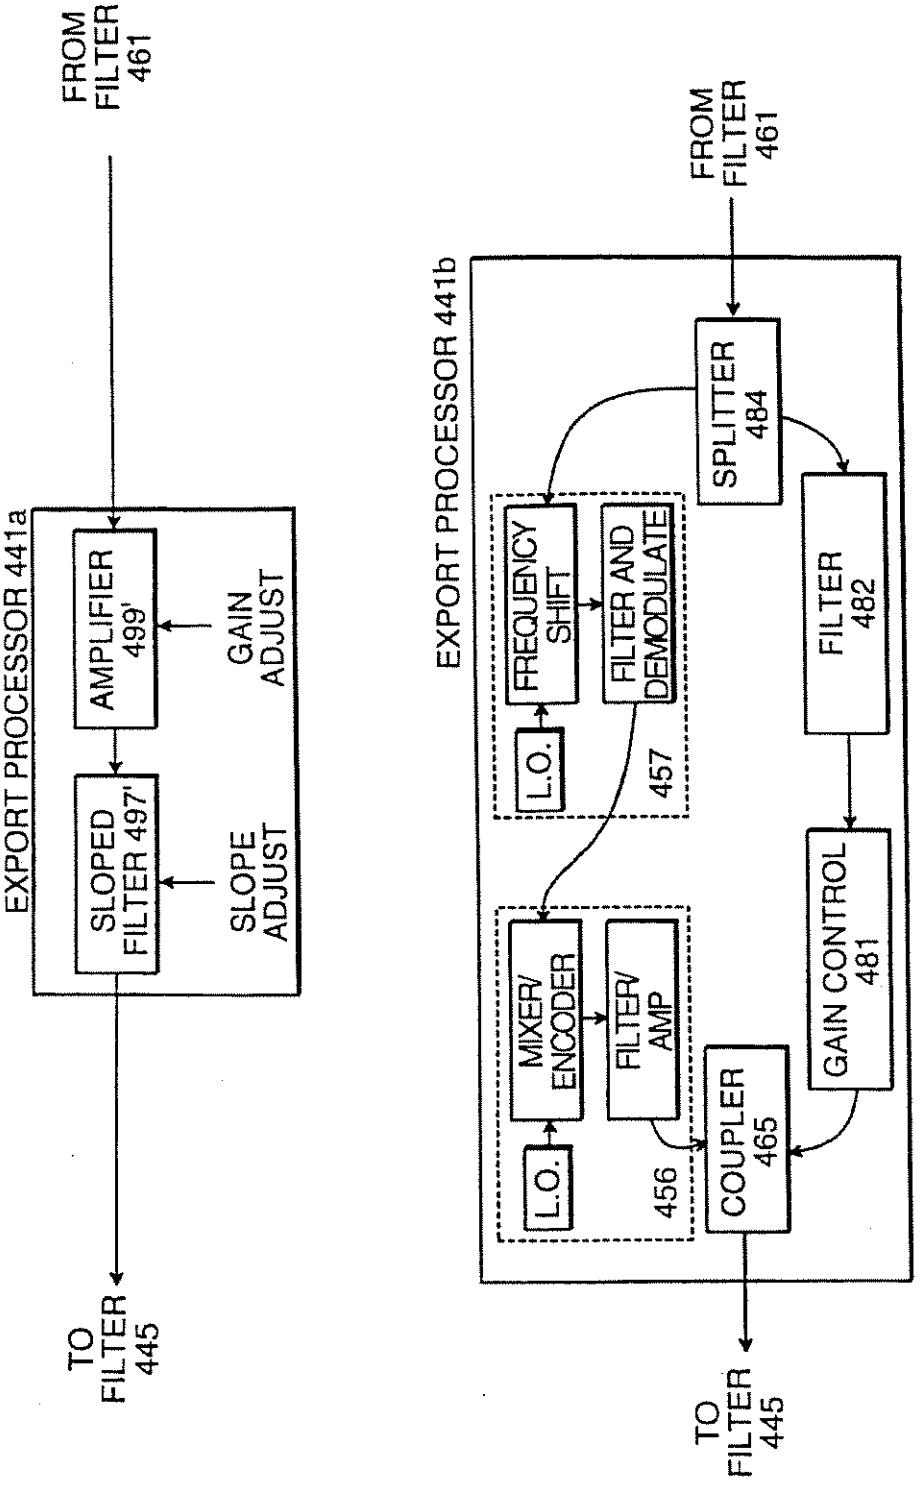
FROM FILTER 461
EXPORT PROCESSOR 441a
AMPLIFIER 499'
GAIN ADJUST
SLOPED FILTER 497'
SLOPE ADJUST
TO FILTER 445
FROM FILTER 461
EXPORT PROCESSOR 441b
SPLITTER 484
FREQUENCY SHIFT
FILTER AND DEMODULATE
L.O.
457
FILTER 482
MIXER/ ENCODER
FILTER/ AMP
L.O.
456
COUPLER 465
GAIN CONTROL 481
TO FILTER 445

FIG. 11c

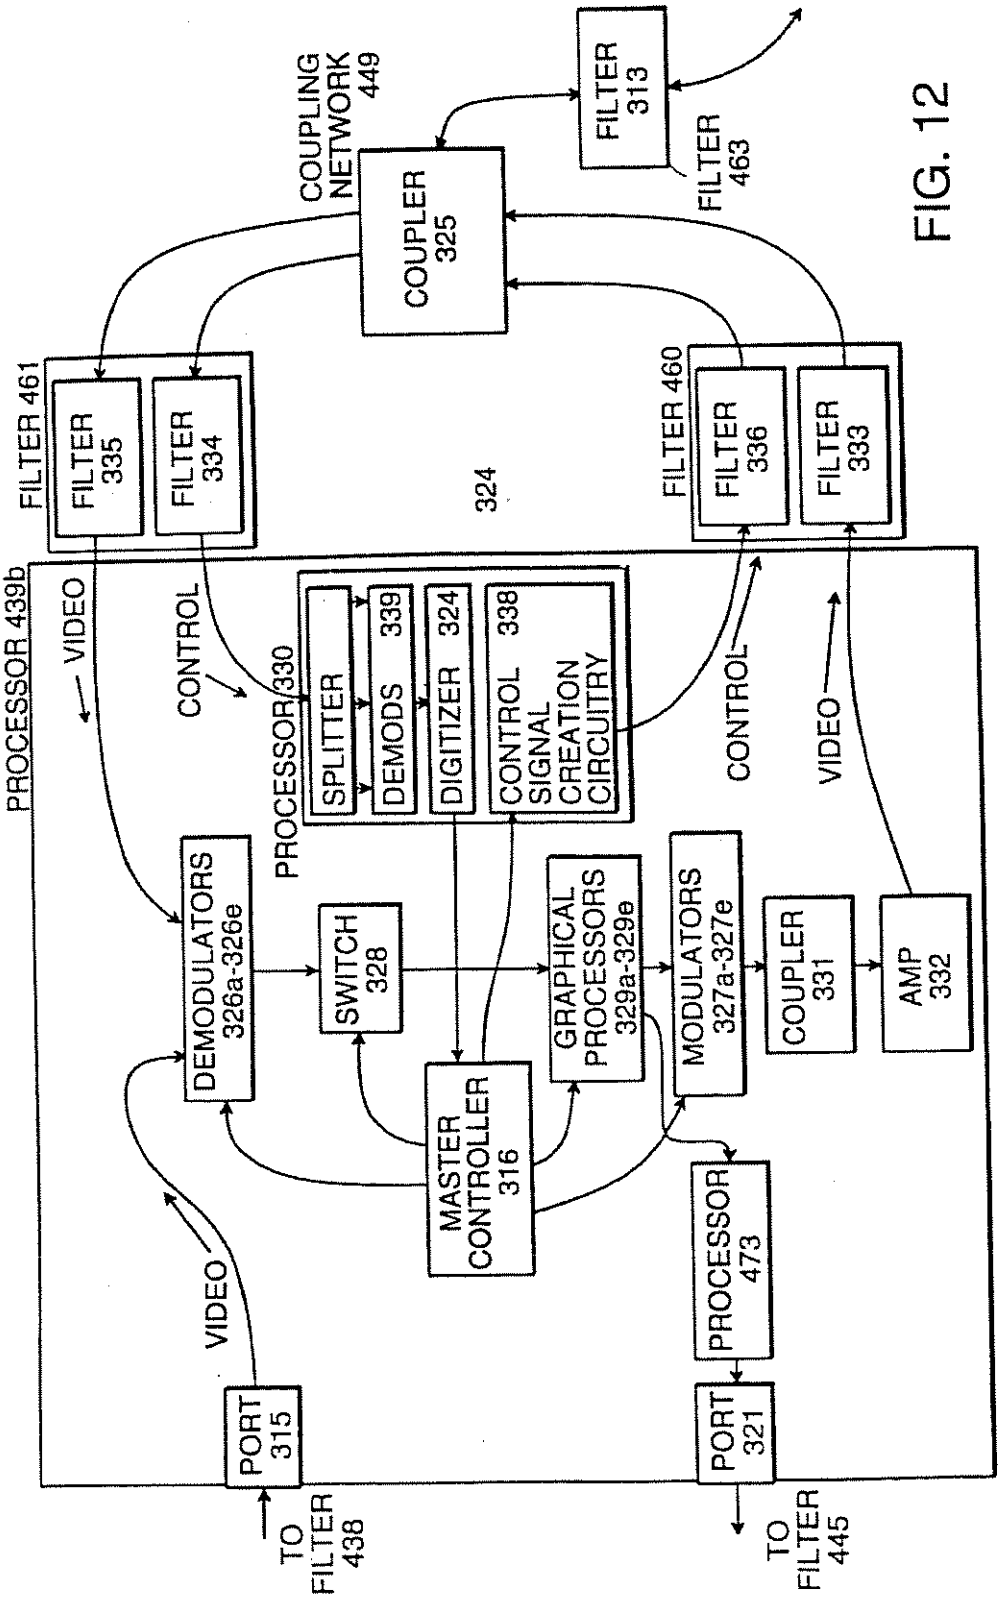
COUPLING NETWORK 449
COUPLER 325
FILTER 313
FILTER 463
FILTER 461
FILTER 335
FILTER 334
FILTER 460
FILTER 336
FILTER 333
324
PROCESSOR 439b
VIDEO
CONTROL
PROCESSOR 330
SPLITTER
DEMODS 339
DIGITIZER 324
CONTROL SIGNAL CREATION CIRCUITRY 338
CONTROL
VIDEO
DEMODULATORS 326a-326e
SWITCH 328
GRAPHICAL PROCESSORS 329a-329e
MODULATORS 327a-327e
COUPLER 331
AMP 332
MASTER CONTROLLER 316
PROCESSOR 473
VIDEO
PORT 315
PORT 321
TO FILTER 438
TO FILTER 445

FIG. 12

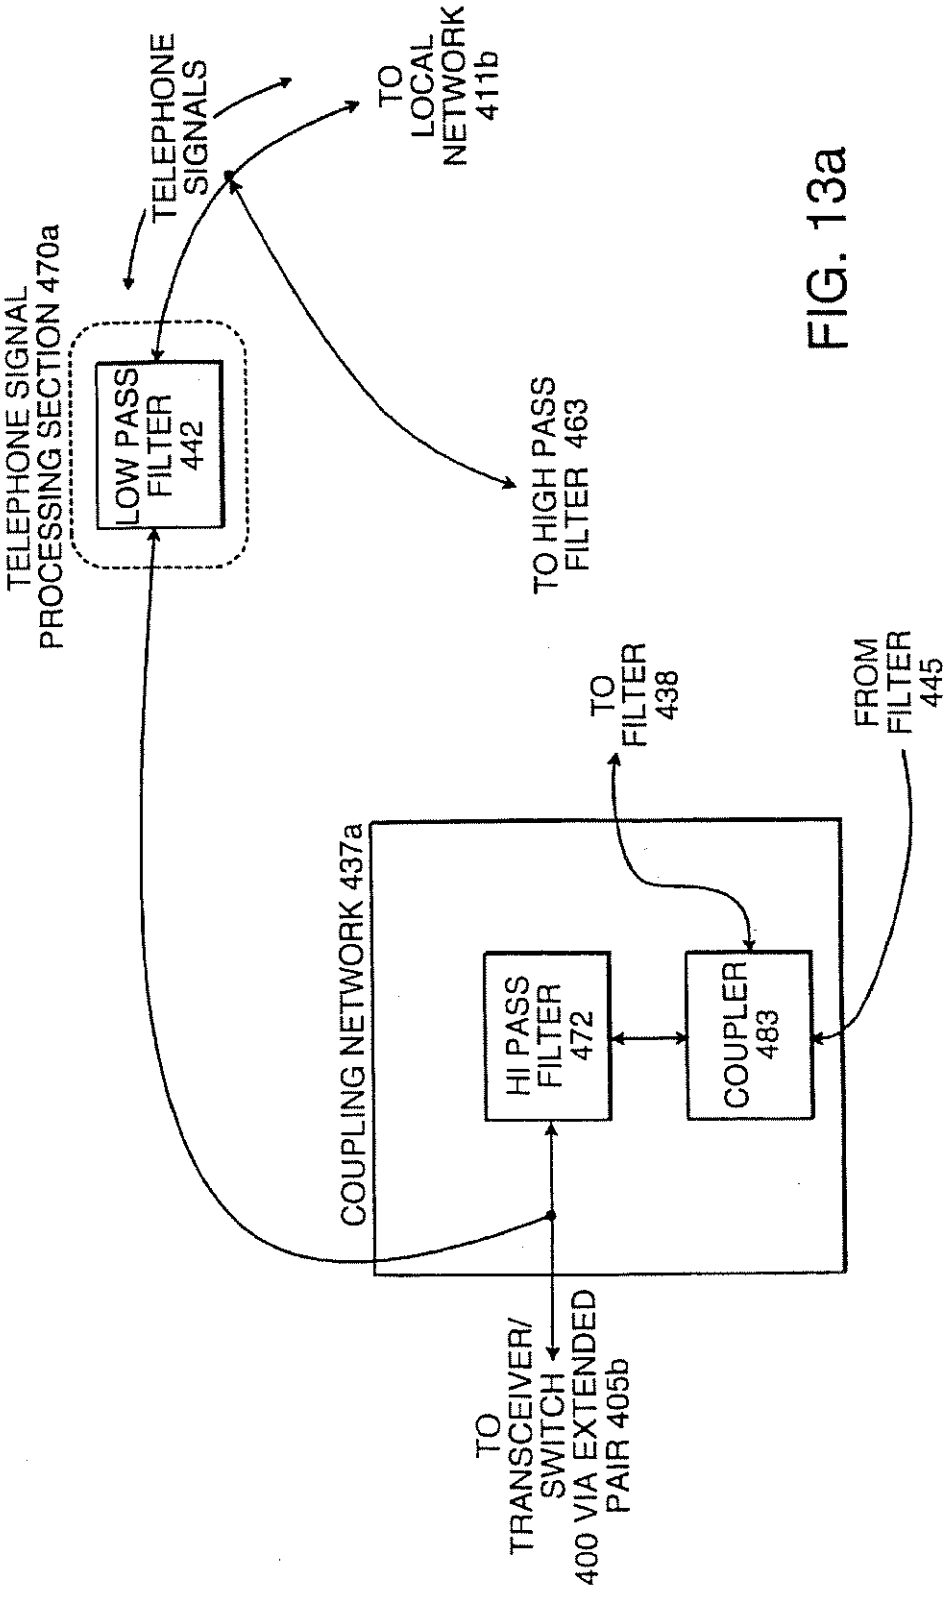
TELEPHONE SIGNAL PROCESSING SECTION 470a
LOW PASS FILTER 442
TELEPHONE SIGNALS
TO LOCAL NETWORK 411b
TO HIGH PASS FILTER 463
TO FILTER 438
FROM FILTER 445
COUPLING NETWORK 437a
HI PASS FILTER 472
COUPLER 483
TO TRANSCEIVER/ SWITCH 400 VIA EXTENDED PAIR 405b

FIG. 13a

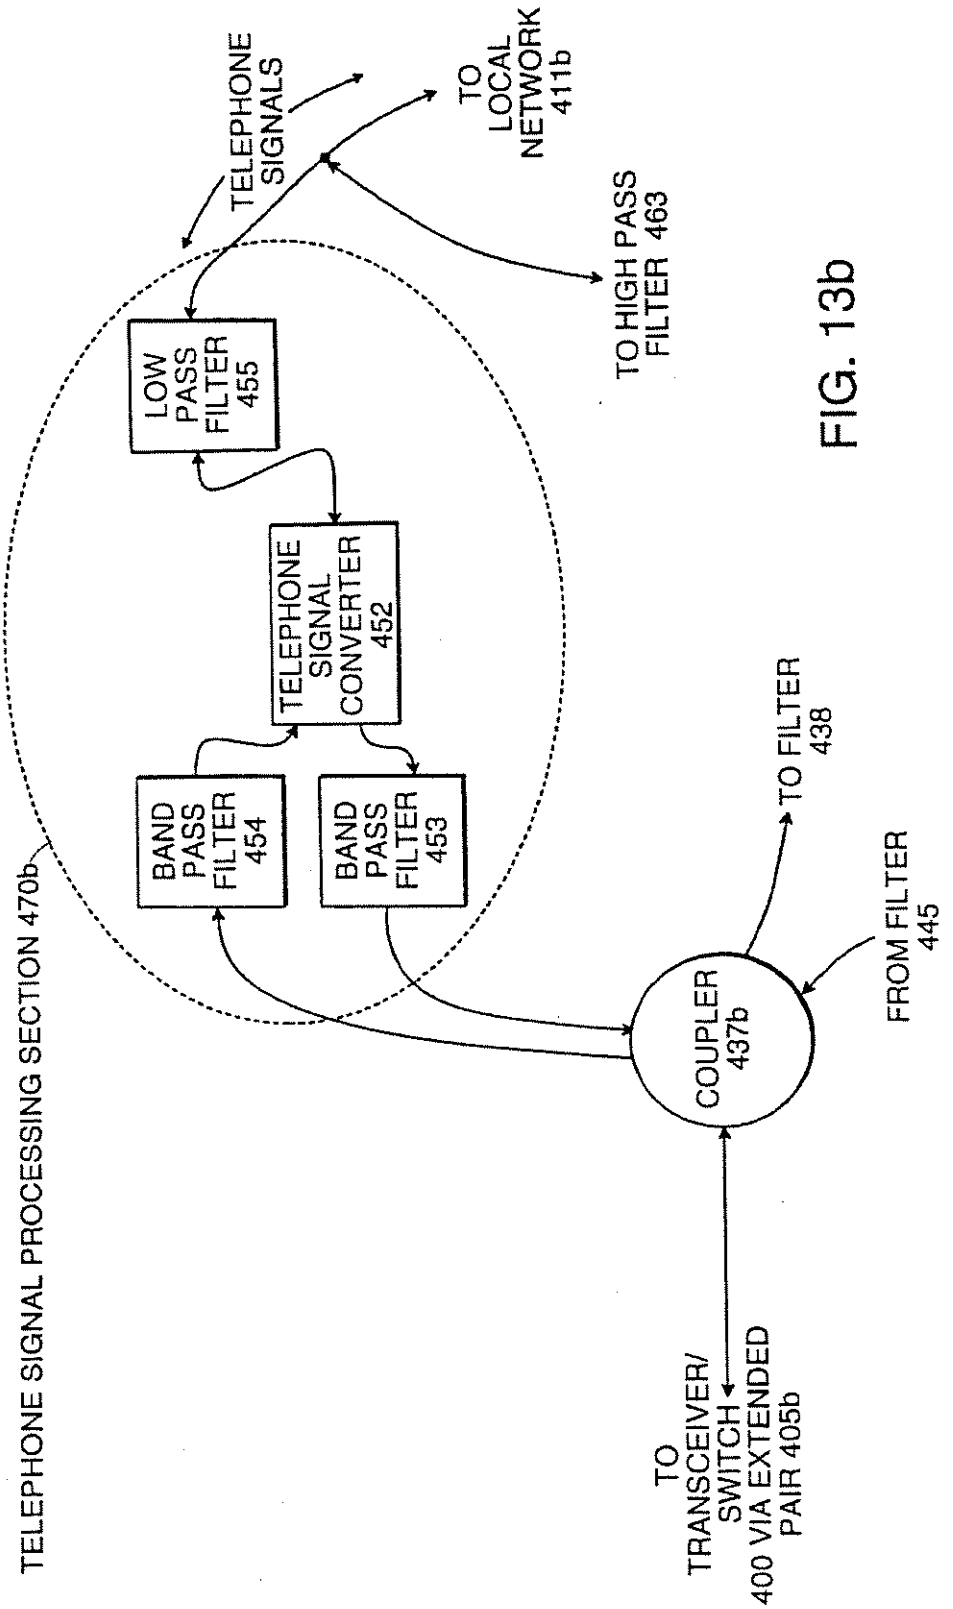
TELEPHONE SIGNALS
TO LOCAL NETWORK 411b
TO HIGH PASS FILTER 463
LOW PASS FILTER 455
TELEPHONE SIGNAL CONVERTER 452
BAND PASS FILTER 454
BAND PASS FILTER 453
TELEPHONE SIGNAL PROCESSING SECTION 470b
TO FILTER 438
FROM FILTER 445
COUPLER 437b
TO TRANSCEIVER/ SWITCH 400 VIA EXTENDED PAIR 405b

FIG. 13b

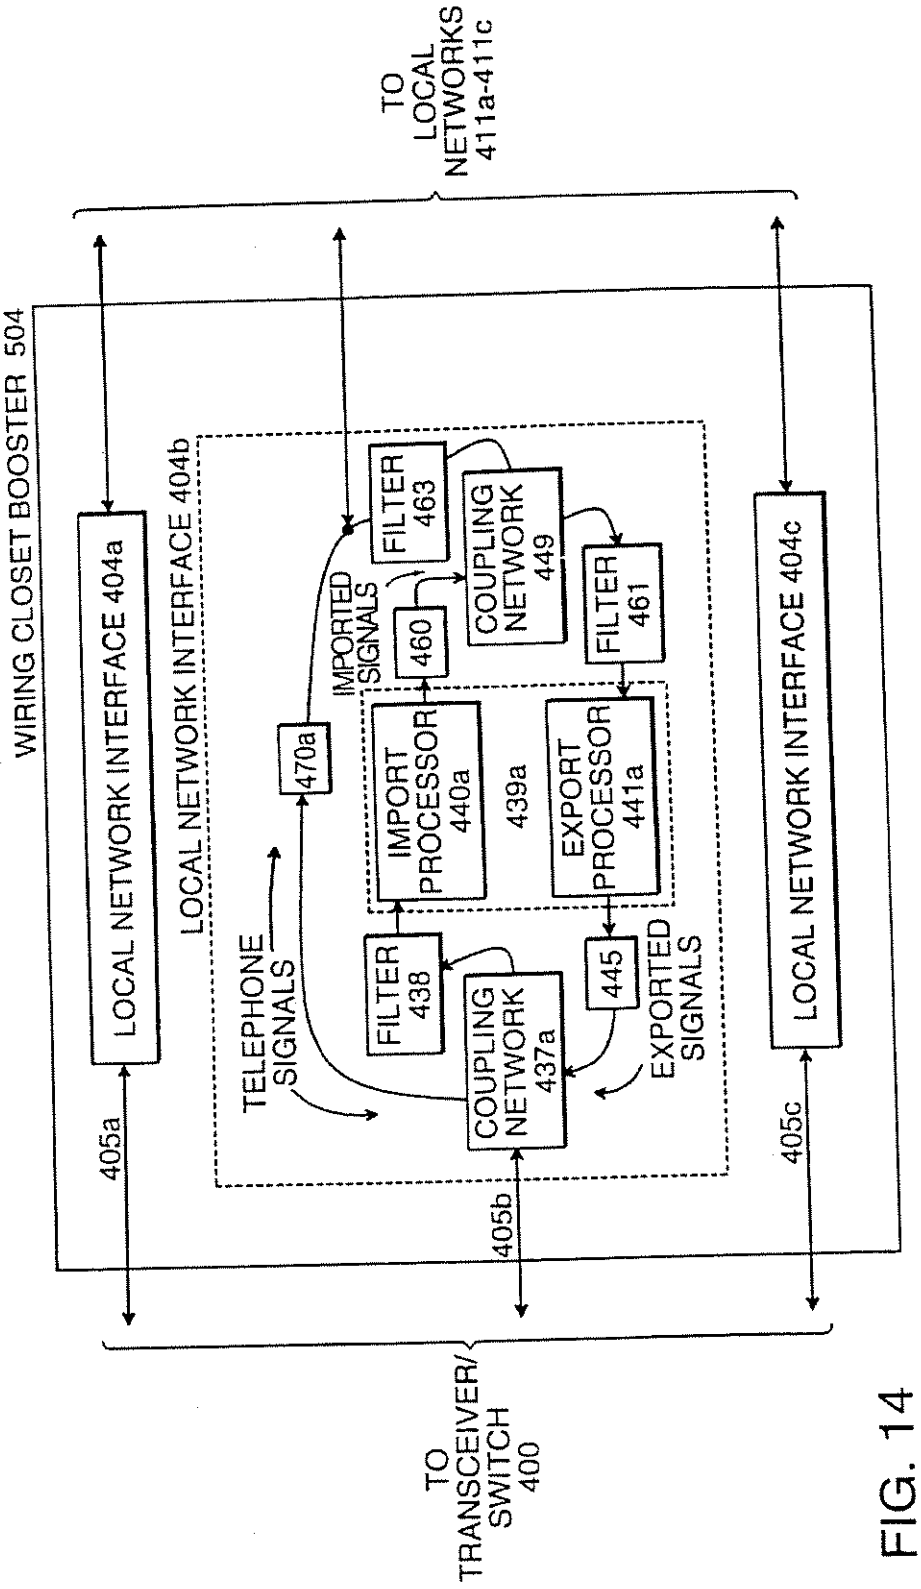
TO LOCAL NETWORKS 411a-411c
WIRING CLOSET BOOSTER 504
LOCAL NETWORK INTERFACE 404a
LOCAL NETWORK INTERFACE 404b
LOCAL NETWORK INTERFACE 404c
FILTER 463
COUPLING NETWORK 449
FILTER 461
IMPORTED SIGNALS
460
470a
IMPORT PROCESSOR 440a
439a
EXPORT PROCESSOR 441a
TELEPHONE SIGNALS
FILTER 438
COUPLING NETWORK 437a
445
EXPORTED SIGNALS
405a
405b
405c
TO TRANSCEIVER/ SWITCH 400

FIG. 14

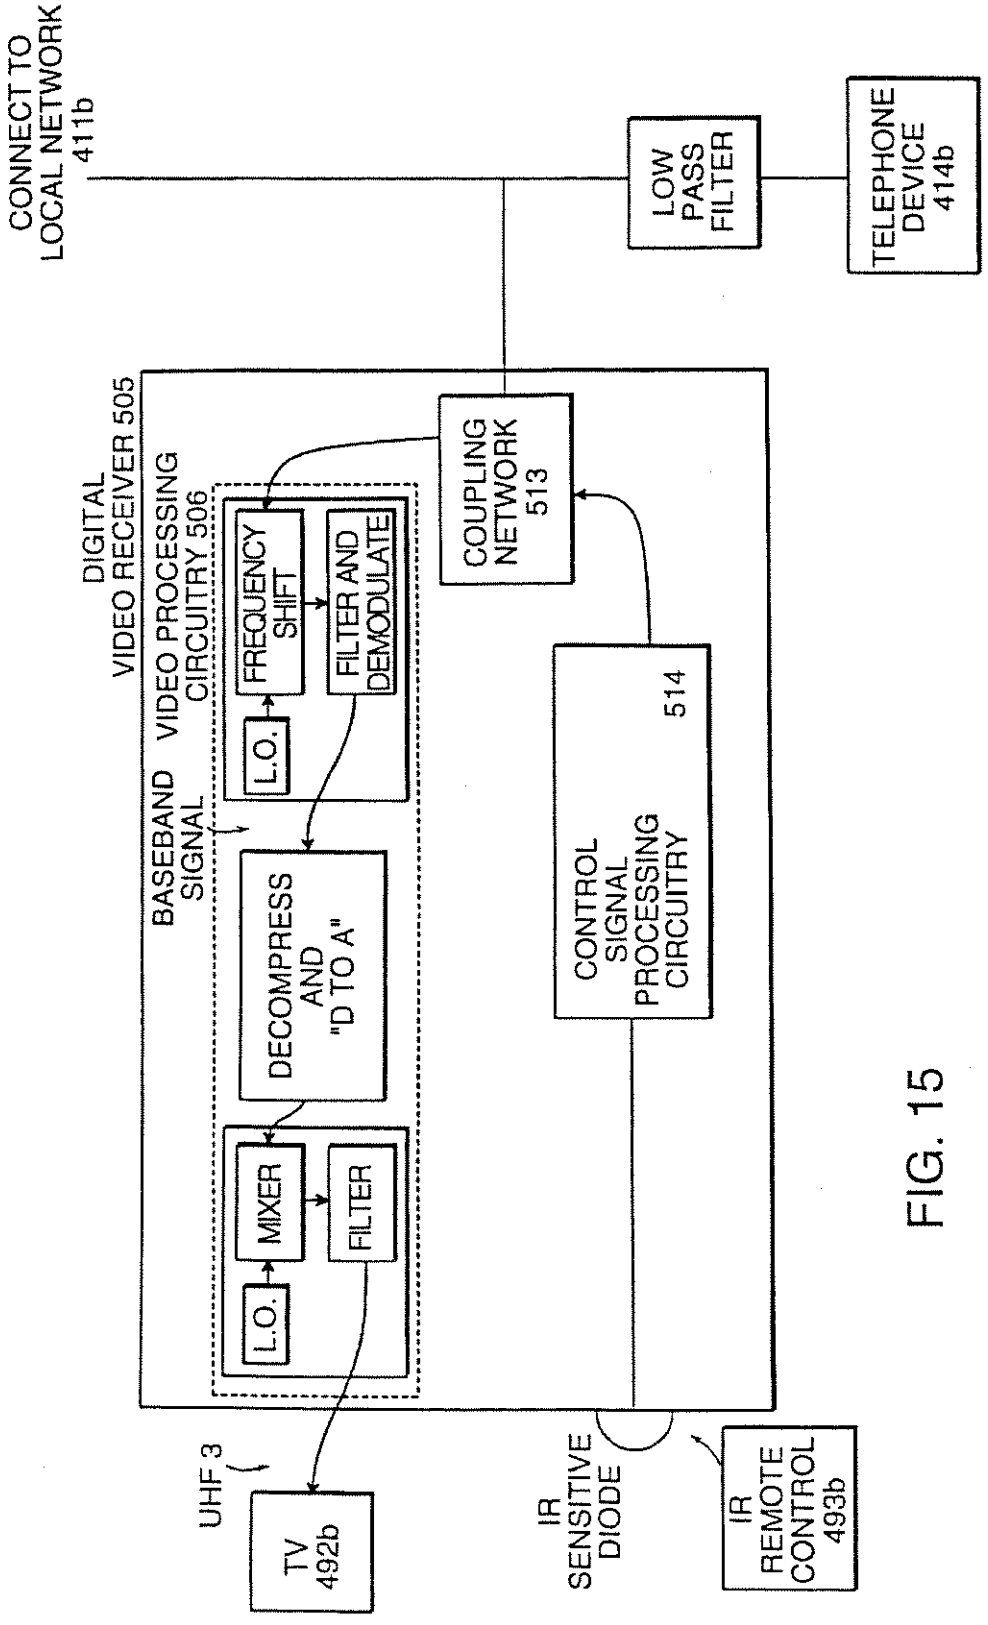
CONNECT TO LOCAL NETWORK 411b
LOW PASS FILTER
TELEPHONE DEVICE 414b
DIGITAL VIDEO RECEIVER 505
VIDEO PROCESSING CIRCUITRY 506
COUPLING NETWORK 513
FREQUENCY SHIFT
FILTER AND DEMODULATE
L.O.
BASEBAND SIGNAL
DECOMPRESS AND "D TO A"
CONTROL SIGNAL PROCESSING CIRCUITRY 514
MIXER
FILTER
L.O.
UHF 3
TV 492b
IR SENSITIVE DIODE
IR REMOTE CONTROL 493b

FIG. 15

FIG. 16

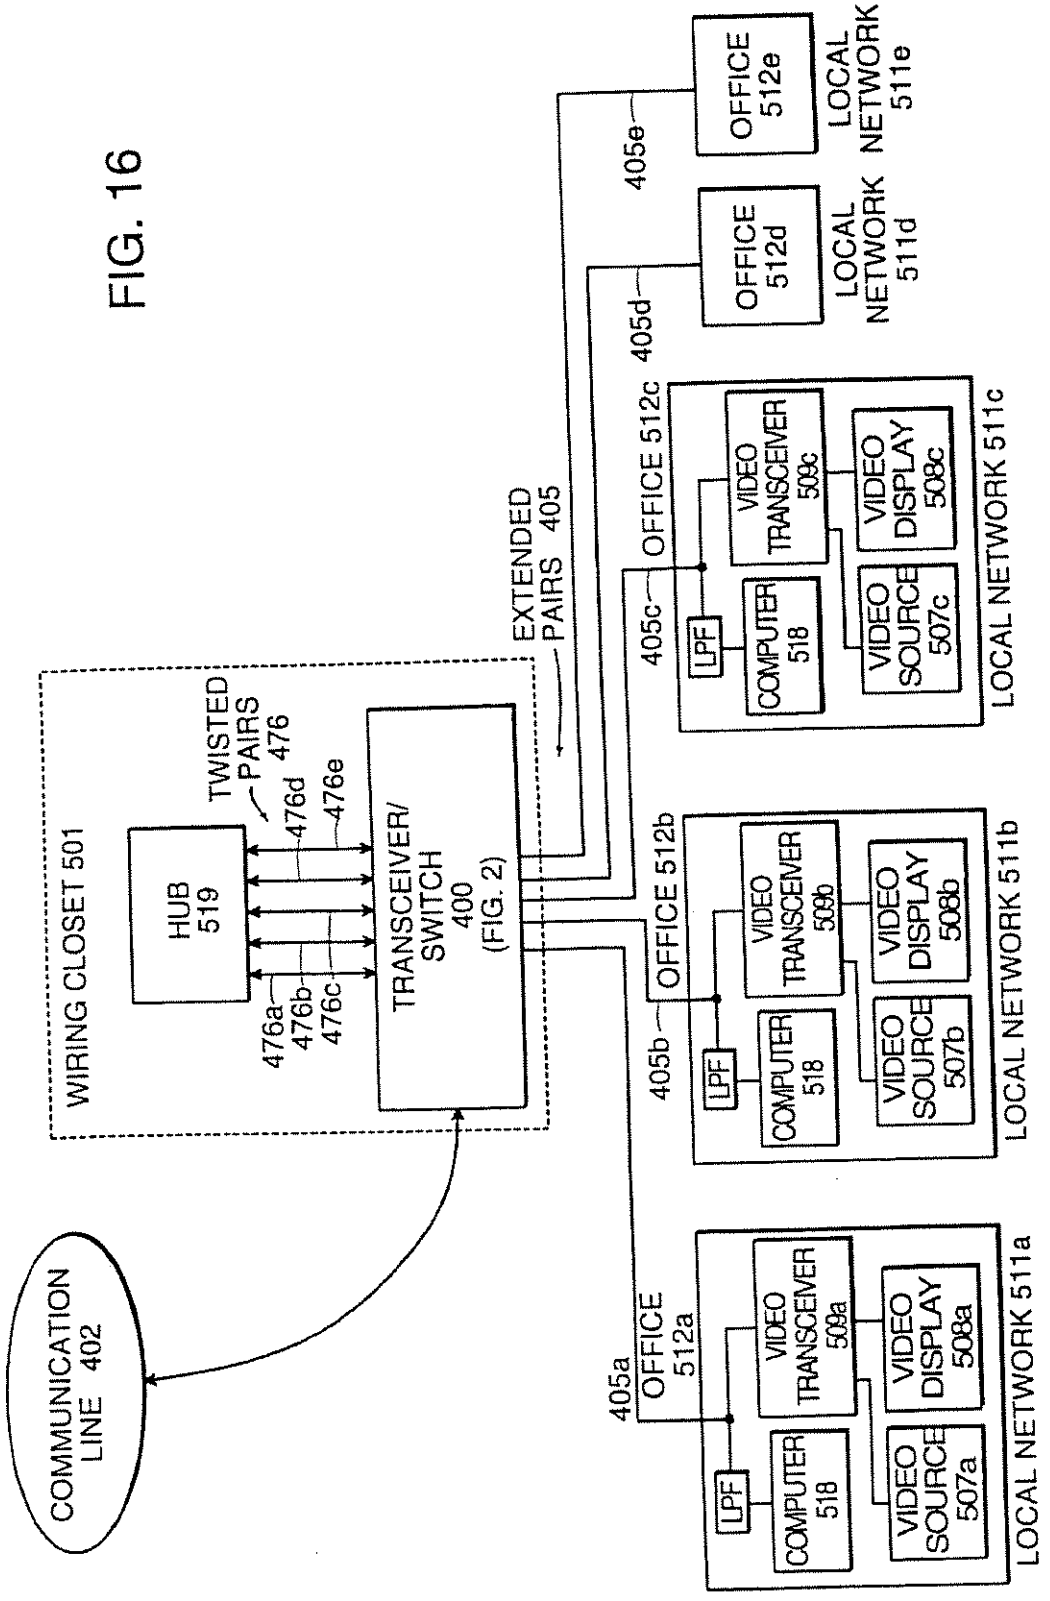
WIRING CLOSET 501
HUB 519
TWISTED PAIRS 476
476a
476b
476c
476d
476e
TRANSCEIVER/ SWITCH 400 (FIG. 2)
EXTENDED PAIRS 405
COMMUNICATION LINE 402
405a
OFFICE 512a
405b
OFFICE 512b
405c
OFFICE 512c
405d
OFFICE 512d
405e
OFFICE 512e
LOCAL NETWORK 511a
LOCAL NETWORK 511b
LOCAL NETWORK 511c
LOCAL NETWORK 511d
LOCAL NETWORK 511e
VIDEO TRANSCEIVER 509a
VIDEO DISPLAY 508a
VIDEO SOURCE 507a
COMPUTER 518
LPF
VIDEO TRANSCEIVER 509b
VIDEO DISPLAY 508b
VIDEO SOURCE 507b
VIDEO TRANSCEIVER 509c
VIDEO DISPLAY 508c
VIDEO SOURCE 507c

TWO-WAY RF COMMUNICATION AT POINTS OF CONVERGENCE OF WIRE PAIRS FROM SEPARATE INTERNAL TELEPHONE NETWORKS

CROSS REFERENCE TO RELATED APPLICATIONS

This is a continuation of application Ser. No. 08/673,577, filed Jul. 1, 1996, now abandoned, which is a continuation of U.S. patent application Ser. No. 08/545,937 filed Oct. 20, 1995, now abandoned, which is a continuation of Ser. No. 08/372,561, filed Jan. 13, 1995, now abandoned, which is a continuation of Ser. No. 08/245,759, filed May 18, 1994, now abandoned, which is a continuation of 08/115,930, filed Aug. 31, 1993, now abandoned; which is a continuation of 07/802,738, filed Dec. 5, 1991; now abandoned; which is a continuation-in-part of 07/688,864, filed Apr. 19, 1991 now abandoned; which is a continuation-in-part of 07/379,751, filed Jul. 14, 1989, now Patent No. 5,010,399.

INTRODUCTION

The present invention relates to a system for simultaneous two-way communication of video signals and other signals between multiple networks of telephone wiring whose twisted pairs converge together into a single bundle, wiring block, or other common point of access, and a high capacity communication line located at that point of access. Each network includes a set of interconnected, active telephone wires (i.e., a group of wires that create a conductive path for telephonic signals) internal to a house, an apartment unit, or a room in a commercial building. (Such wiring internal to houses, apartment units, or rooms in commercial buildings shall be referred to herein as "local networks.") In the case of houses, the point of common access can be a telephone pole. In the case of apartment buildings, the point of access can be the "wiring closets" found in those buildings. In the case of commercial buildings, the point of access can be the electronic PBX, or "private branch exchange" common to those types of buildings. The high capacity line can be a coaxial cable or an optical fiber. In addition to communication between each network and the high capacity line, communication from one network to another is also provided.

This invention is partly an outgrowth of technology presented in the parent application, and two other continuations-in-part thereof, respectively entitled "RF Broadcast System Utilizing Internal Telephone Lines" (hereinafter, the "first CIP application") and "Cable TV Distribution and Communication System Utilizing Internal Telephone Wiring" (hereinafter, the "second CIP application"). The first and second CIP applications were filed on the same day as this application. The parent application and the first and second CIP applications are incorporated herein by reference.

The communication systems disclosed in the parent and first and second CIP applications are designed to simultaneously transmit telephone signals and non-telephonic signals (such as cable television signals, other video signals, audio signals, data signals, and control signals) across the active telephone wiring internal to (i.e., locally within) residences and other structures. The present invention adds to these techniques, providing distribution of all of these signals to a local network of active telephone wiring (i.e. the wiring internal to a house, apartment unit, or a room in a commercial building) from a distribution device that connects to the trunk line of a public or private telephone

network. That device is located where the telephone lines for multiple local networks converge to meet the public network trunk (or PBX, in the case of office buildings), enabling the distribution device to perform communication functions for many local networks at once, including communication between one local network and another. The distribution system works just as well when the point of convergence is the center of a computer communications network with a "star" topology, and the wires are the twisted pair wires connecting each individual computer to this center.

BACKGROUND OF THE INVENTION

The current method of providing cable TV signals to a house requires that a cable branch (typically a coaxial cable) connect from the main cable trunk to each subscriber. In addition, at the end of the subscriber branch, an additional segment of the coaxial cable must be installed for every extra TV "hookup" within the residence.

The challenge of providing cable TV to an apartment building is even more formidable. If coaxial cabling is not included at the time of construction, a coaxial cable leading through the entire building must be installed, and a branch must connect between each of the individual apartment units to a point on this cable. This is obviously an expensive procedure, even if easily accessible cabling conduits exist. Furthermore, each branch provides service at only one location within the unit it connects. Extra branches must be installed to provide cable TV service at other locations in the unit.

Providing a group of TV signals to various rooms in an office building currently requires a similar amount of coaxial cable installation. The demand for economical video distribution within office buildings is increasing, moreover, because of the increased popularity of video teleconferencing.

The method of distributing cable TV signals commonly used in the U.S. can be called a "one-way branched" system because signals transmitted at the head-end (i.e., at the root or entrance point to the network) spread across to each of the various subscribers by continually splitting into multiple downstream branches. Due to an increase in the popularity of video programming, however, demand for a new system has emerged. Under the new system, sometimes called "video on demand," a subscriber can request a specific program from a library of programs stored at a central location on, for example, video tapes. The signal from this program is subsequently sent to the subscriber from the "head end" of the system. No other viewers can receive the same signal unless they make a similar request.

One method for providing video on demand is to install a high-capacity fiber optic transmission line from the library through a series of residential or commercial neighborhoods. At each neighborhood, all signals targeted for the local residences or businesses (hereinafter, the term "residence" is used to mean both types of buildings unless otherwise stated) are encoded (i.e. scrambled) and then "handed off" at different channels onto the coaxial cable branch that feeds those residences. Thus, each neighborhood has its own individual headend at the point of handoff.

To prevent all residences from receiving each of the signals handed off to their neighborhood, a control signal is sent over the fiber optic transmission line that includes the "address" of a converter box in the house of the subscriber who requests a particular signal. This control signal provides descrambling instructions that, because of the addressing, only the targeted converter box will recognize. Under this